


特点 Features

- 5A 触点切换能力 5A
Switching capability
- 耐冲击电压：10,000 伏
Impulse withstand voltage(between coil and contact) : 10,000V
- 可提供满足 IEC60335-1、IEC60079-15、满足 750°C灼热丝以及 CTI 250V 要求的产品
Product in accordance to IEC60335-1/IEC60079-15/ GWT 750°C and CTI≥ 250V is available.
- 外形尺寸: 18.2mm×10.2mm×15.5mm
Dimensions: 18.2mm×10.2mm×15.5mm

安规认证 Safety Approval

UL、C-UL 认证号 File No : E190598
 VDE 认证号 File No : 40002146
 CQC 认证号 File No : CQC02001002114、CQC09002030583、CQC11002064518

触点负载 Contact Capacity

型号 Type	SJ-DM/(0.45W)	SJ-LM/(0.2W)
额定负载 (阻性) Nominal switching capacity (res. load)	5A 250VAC	3A 250VAC
最大切换电流 Max. Switching Current	5A	5A
最大切换电压 Max. Switching voltage	277VAC	277VAC
最大切换功率 Max. Switching power	1,385VAC	1,385VAC
最小切换负载 Min. Switching load	6V 1A	6V 1A

性能参数 Characteristic Data

触点材料 Contact material	银合金 Silver alloy
接触电阻 Contact resistance	100mΩ Max. (at 1A 6VDC)
吸合时间 (额定电压) Actuation time (at rated coil voltage)	10msec. Max. (不加二极管 No diode)
释放时间 Release time (at rated coil voltage)	5msec. Max. (不加二极管 No diode)
绝缘电阻 Insulation resistance	1,000MΩ Min. (DC500V)
介质耐压 Dielectric strength	触点与触点间：AC1,000V 50/60Hz 1min. Between open contacts: AC1,000V 50/60Hz 1min.

	触点与线圈间 : AC4,000V, 50/60Hz 1min. Between coil and contact: AC4,000V, 50/60Hz 1min.	
抗振动 Vibration resistance	耐久 Durableness	10 ~ 55Hz, 双振幅 1.5 mm 10 ~ 55Hz, at double amplitude of 1.5mm
	误动作 Functional	10 ~ 55Hz, 双振幅 1.5 mm 10 ~ 55Hz, at double amplitude of 1.5mm
抗冲击 Shock resistance	耐久 Durableness	100G Min.
	误动作 Functional	10G Min.
寿命 Endurance (Operations)	机械寿命(每小时 10,800 次) Mechanical endurance 10,800ops/h	10,000,000 次
	⁽²⁾ 电气寿命(每小时 360 次) Electrical endurance (360ops/h)	100,000 次
环境温度 Ambient temperature	-40°C ~ +105°C (不冷凝) -40°C ~ +105°C (No condensation)	
环境湿 Ambient humidity	5% ~ 85%RH	
重量 Weight	约 5.6g Approx. 5.6g	

(1) 上述值为初始值。

The Data shown above are initial values

(2) 以上仅列出该产品认证部分典型负载,而每个负载详细测试条件不同,因此电寿命耐久性不一样。如需了解详细信息,请与我司技术部门联络。
Only typical loads are listed above. Other load specifications can be available upon request

(3) 以上耐久性电寿命测试,条件均为开孔品状态。

The electrical endurance test has been carried out on flux proofed version.

线圈参数(at 20°C) CoilData (at 20°C)

额定电压 Rated voltage (VDC)	额定电流 Nominal operating current ±10% (mA)	线圈电阻 Coil resistance ±10% (Ω)	最大外加电压 Max allowable voltage (VDC)	吸合电压 Pick-up voltage (Max.)	释放电压 Drop-out voltage (Min.)	额定功率 Coil power (W)
3	150.00	20	额定电压的 130% 130% of Nominal Voltage	额定电压的 75% 75% of Nominal Voltage	额定电压的 5% 5% of Nominal Voltage	约 0.45W Approx. 0.45W
5	90.00	55				
6	75.00	80				
9	50.00	180				
12	37.50	320				
18	25.00	720				
24	18.75	1280				约 0.2W Approx. 0.2W
3	66.67	45				
5	40.00	125				
6	33.33	180				
9	22.22	405				
12	16.66	720				

18	11.11	1620				
24	8.33	2880				

上述值为初始值；请勿在产品上连续施加最大电压 > 10min，以免线圈过度发热。

The Data shown above are initial values. Do not energize the maximum allowable voltage of the coil for more than 10 minutes to avoid overheating of the coil.

安规认证负载（注：更多详细的认证负载，参考安规证书）

Safety Approval Ratings (Note: More detail of approval ratings, please refer to the safety certification)

认证类型 Approval	CQC	TUV	VDE	UL/CUL
证书号 File No.	CQC02001002114 CQC09002030583 CQC11002064518	R50142420	40002146	E190598
认证负载 Approved Ratings	SJ-D & SJ-L : 5A 250VAC	SJ-D : 5A 250VAC	SJ-D : 5A 250VAC SJ-L : 3A 250VAC 5A 250VAC	SJ-D: 5A 277VAC, Resistive 5A 250VAC, Resistive & General Use 5A 28VDC, Resistive 1.5A 250VAC, General Use SJ-L: 3A 277VAC, Resistive 5A 120VAC, Resistive 3A 250VAC, Resistive & General Use 3A 28VDC,, Resistive 1A 250VAC, General use

(1) 上述未注明温度的负载，均指环境温度为室温。

All values unspecified are at room temperature.

(2) 以上仅列出了该产品认证的部分负载，每个负载的详细测试条件不同，因此电寿命次数不一样。如需了解详细情况，请联系三友。

Only typical loads are listed above. Other load specifications can be available upon request. The electrical endurance cycles of each load is different due to the different test conditions. If more details are required, please contact us.

(3) 对于塑封式、防水式产品试验时，应打开外壳的透气孔。

The electrical endurance test has been carried out on flux proofed version.

订货标记 Ordering Information

型号命名规则 Nomenclature

SJ	-S	-1	12	D	M	2	-F	-XX	特殊参数：无-标准型,XX-客户要求类型 Special code : Nil-Standard , Letter or number-Special requirement
									绝缘等级：无-普通型 ,B-Class B ,F- Class F Insulation class : Nil-Standard type ,B-Class B ,F- Class F
									触点材质：无--AgSnO ₂ , 2-AgNi Contact material : Nil-AgSnO ₂ , 2-AgNi
									负载能力：无-5A、3A Contact capacity : Nil-5A、3A
									触点形式：M-Form A Contact form : M-Form A
									线圈功耗：L-0.2W, D-0.45W Coil power : L-0.2W, D-0.45W
									线圈电压：03, 05, 06, 09, 12, 18, 24 (VDC) Rated coil voltage(VDC) : 03,05,06,09,12,18,24
									触点组数：1-1 组 Number of poles : 1-1Pole
									封装形式：S-塑封式, SH-防水式 Protective construction : S-Flux proofed , SH-Sealed type washable
									基本型号：SJ Basic series : SJ

(1) 塑封式不能在污染环境 (含有 H₂S、SO₂、NO₂、粉尘等污染物) 中使用。

Flux-proofed relays can not be used in the environment with pollutants like H₂S, SO₂, NO₂, dust, etc.

(2) 塑封式装入 PCB 焊接后, 不能进行整体清洗或表面处理。


Water cleaning or surface process is not suggested after the flux-proofed relays are assembled on PCB.

(3) 客户特殊要求 (XX), 由我司评估后, 按特性符号标识。

Special requirements of customers (XX) shall be evaluated by our company and marked by characteristic symbols.

外形尺寸图、接线图、安装孔位图 (单位: mm)

Outline dimension drawing, wiring diagram, installation vacancy drawing (unit: mm)

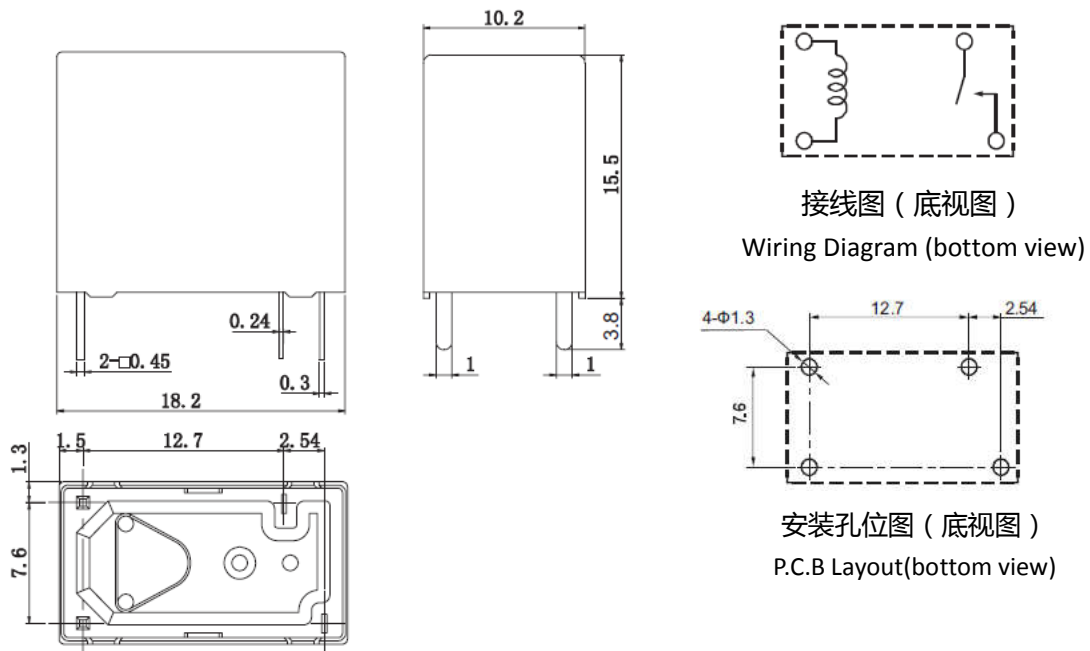


未标注尺寸公差 Unless otherwise specified :
 < 1mm : ±0.2mm 1~5mm : ±0.3mm > 5mm : ±0.4mm
 注 : 1、引出脚尺寸为预焊前尺 Extended terminal dimension is dimension before soldering
 2、安装孔尺寸公差 Tolerance of PCB layout : ±.1mm

典型用途 Typical Applications


- 家用设备
● Household appliance
- 办公设备
● Office equipment
- 音响设备
● Sound equipment
- 空调
● Air conditioner

性能曲线图 Characteristic Curves


最大切换功率
Max. Switching Power

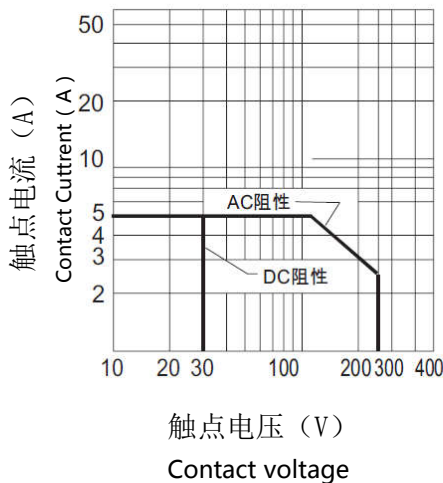

寿命曲线
Endurance Curve

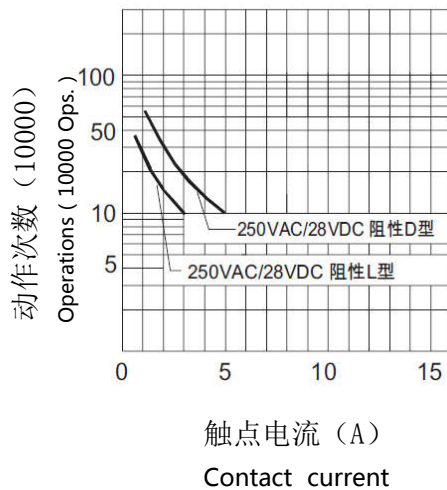

线圈温升
Coil Temp. Rise

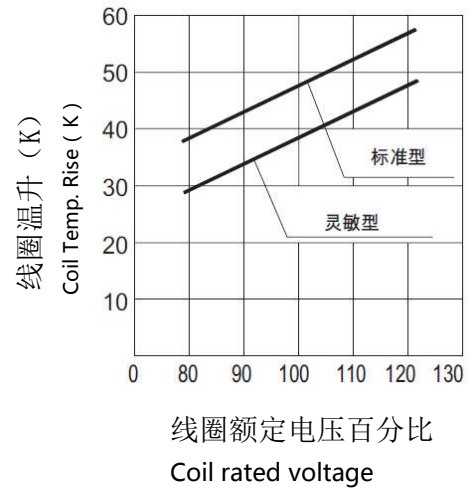

声明：本产品规格书仅供客户使用时参考，若有更改，恕不另行通知。

对三友而言，不可能评定继电器在每个具体应用领域的所有性能参数要求，因而客户应该根据具体的使用条件选择与之相匹配的产品。对于密封继电器在安装清洗后，使用前请打开外壳上的透气孔。如有疑问，请与三友联系获取更多的技术支持。但产品选型责任仅由客户负责。

Disclaimer : The specification is for reference only. Specifications subject to change without notice.

This datasheet is for customers' reference. All the specification are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should in a right position to choose the suitable product for their own application. For sealed relays after installation and cleaning, please open the vent hole on the case before use. If there is any query, please contact Sanyou for technical service. However it is the user's responsibility to determine which product should be used only.