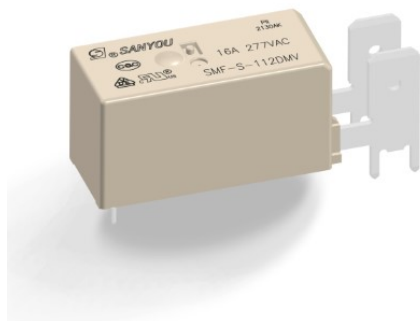



特点 Features

- 小型 16A 切换能力。高度仅 15.7mm 高度，具有立式及卧式输出快接端子型。
High contact capability: 16A switching capability, Small, Height only 15.7mm., Vertical or Horizontal quick terminal output.
- 爬电距离达 10mm, 耐压可达 5kV (线圈触点间), 耐 10KV 浪涌电流
Creepage distance ≥ 10 mm, IP /OP 5,000V. Withstand surge voltage of 10KV
- 满足 IEC60335-1 GWIF 850°C / GWIT 775°C 要求 CTI ≥ 250 V
Compliance with IEC60335-1 GWIF850°C/GWIT775°C; CTI ≥ 250 V
- 使用环境高达 -40°C~105°C, -40°C~125°C (仅 VDE 适用)
Ambient temperature range -40°C ~ 105°C, -40°C ~ 125°C (confirmed by VDE only)
- 符合欧洲 RoHS 及白色家电要求
Compliance with RoHS and the requirements for White Goods
- 可提供满足 IEC 60335-1/IEC 60079-15 的产品
IEC60335-1/IEC 60079-15 compliance product is available.

安规认证 Safety Approval

UL/CUL 认证号 (File No.): E179745
VDE 认证号 (File No.): 40031353
CQC 认证号 (File No.): CQC13002089403

触点负载 Contact Capacity

型号 Model	SMF-1 Pole Form A	SMF-1 Pole Form B
额定负载 (阻性) Nominal switching capacity (Res. load)	16A 277VAC	16A 277VAC
最大切换电流 Max. Switching Current	20A	20A
最大切换电压 Max. switching voltage	277VAC	277VAC
最大切换功率 Max. switching power	4432VA	4432VA

性能参数 Characteristic Data

触点材料 Contact material	银合金 Silver alloy	
接触电阻 Contact resistance	100m Ω Max. (1A 6VDC)	
吸合时间 Actuation time	15msec. Max. (不加二极管 No diode)	
释放时间 Release time	10msec. Max. (不加二极管 No diode)	
绝缘电阻 Initial insulation resistance	1,000M Ω Min.(DC500V)	
介质耐压 Initial dielectric strength	触点与触点间 Between open contacts: AC1,000V, 50/60Hz 1min.	
	触点与线圈间 Between coil and contact: AC2,500V, 50/60Hz 1min.	
抗振动 Vibration resistance	耐久 Functional	10 ~ 55Hz, 双振幅 1.5 mm 10 ~ 55Hz, at double amplitude of 1.5 mm
	误动作 Destructive	10 ~ 55Hz, 双振幅 1.5 mm 10 ~ 55Hz, at double amplitude of 1.5 mm
抗冲击 Shock resistance	耐久 Functional	100G Min.
	误动作 Destructive	10G Min.

寿命 Endurance(operations)	机械寿命(每小时 10,800 次) Mechanical (at 10,800 ops./h)	10,000,000 (室温 at room temperature)
	电气寿命(每小时 360 次) Electrical (at 360 ops./h)	100,000 (室温 at room temperature)
环境温度 Ambient temperature	-40°C ~ +105°C, 不冷凝 No condensation -40°C ~ +125°C (仅 VDE 适用 For VDE only)	
重量 Unit weight	约 Approx.15.5g	

线圈参数(at 20°C) Coil Data (at 20°C)

额定电压 Nominal voltage (VDC)	额定电流 Nominal operating Current ±10% (mA)	线圈电阻 Coil Resistance ±10% (Ω)	最大连续外加电压 Max. Allowable voltage	吸合电压 Pick-up voltage (Max.)	释放电压 Drop-out voltage (Min.)	额定功率 Nominal Operating power
5	80.00	62.5	额定电压的 150% 150% of Nominal voltage	额定电压的 75% 75% of Nominal voltage	额定电压的 5% 5% of Nominal voltage	约 0.4W Approx.0.4W
6	66.67	90				
9	44.44	202.5				
12	33.33	360				
18	22.22	810				
24	16.67	1440				
48	8.33	5760				
60	7.00	8570				
110	3.82	28800				

上述值为初始值；请勿在产品上连续施加最大电压 > 10min，以免线圈过度发热。

The data shown above are initial values. Do not energize the maximum allowable voltage of the coil for more than 10 minutes to avoid overheating of the coil.

安规认证负载 (注：更多详细的认证负载，参考安规证书)

Safety Approval Ratings (Note: More detail of approval ratings, please refer to the safety certification)

认证类型 Approval	CQC	VDE	UL/CUL
认证号码 File No.	CQC13002089403	40031353	E179745
认证负载 Approved ratings	16A 277VAC	16A 277VAC (-40°C~+125°C)	16A 277VAC

(1) 上述未注明温度的负载，均指环境温度为室温。

The above-mentioned unspecified temperature ratings, means that the ambient temperature is room temperature.

(2) 以上仅列出了该产品认证的部分负载，每个负载的详细测试条件不同，因此电寿命次数不一样。如需了解详细情况，请联系三友。

Only some typical ratings are listed above. Each rating's test condition is different, so the electrical endurance will be different. If more details are required, please contact us.

(3) 对于塑封式、防水式产品试验时，应打开外壳的透气孔。

For sealed type testing, please open the ventilation hole of case before test.

订货标记 Ordering Information

型号命名规则 Nomenclature

SMF -S -1 12 D M V 1 -F -XX

特殊参数 Special Parameter:	无-标准型, 字母或数字-特殊要求 Nil-Standard type; Letters or Numbers-Special requirements
绝缘等级 Insulation System:	无-普通型(Nil-Standard) B-Class B, F-Class F
触点材质 Contact Material:	无 Nil-AgNi, 1- AgSnO2
端子形式 Terminal Form:	V-立式快接端子 Vertical quick terminal H-卧式快接端子 Horizontal quick terminal
触点形式 Contact Form:	M-Form A, B-Form B
线圈功耗 Coil Power:	D-0.4W
线圈规格 Coil Voltage (VDC):	05, 06, 09, 12, 18, 24, 48, 60, 110
触点组数 Number of Poles:	1-1 组(Pole)
封装形式 Protective Construction:	S-塑封式 Flux proofed SH-防水式 Sealed type washable
基本型号 Type Designation:	SMF

(1) 塑封式不能在污染环境 (含有 H₂S、SO₂、NO₂、粉尘等污染物) 中使用。

Plastic sealing type can not be used in polluted environment (containing H₂S, SO₂, NO₂, dust and other pollutants)

(2) 塑封式装入 PCB 焊接后, 不能进行整体清洗或表面处理。


After the plastic seal product is loaded into PCB welding, the whole cleaning or surface treatment can not be carried out.

(3) 客户特殊要求 (XX), 由我司评估后, 按特性符号标识。


Special requirements of customers (XX) shall be evaluated by our company and marked by characteristic symbols.

外形尺寸图、接线图、安装孔位图 (单位: mm)

Outline dimension drawing, wiring diagram, installation vacancy drawing (unit: mm)

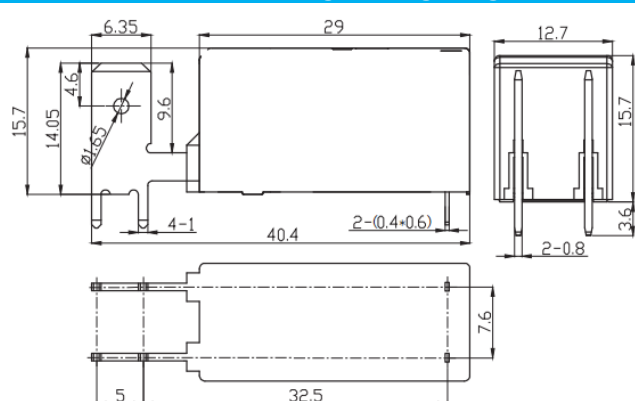

立式快接端子
Vertical quick terminal

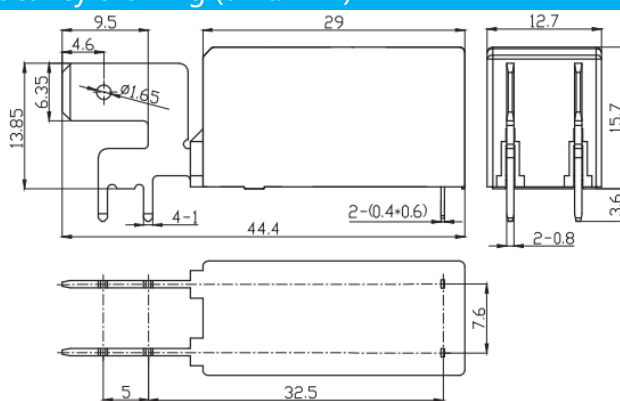

卧式快接端子
Horizontal quick terminal

未标注尺寸公差 Unless otherwise specified:

< 1mm: ±0.2mm 1~5mm: ±0.3mm > 5mm: ±0.4mm

注: 1、引出脚尺寸为预焊前尺寸 Extended terminal dimension is dimension before soldering


2、安装孔尺寸公差 Tolerance of PCB layout: ±0.1mm



1A 接线图 (底视图)
1A Wiring Diagram (bottom view)



1B 接线图 (底视图)
1B Wiring Diagram (bottom view)

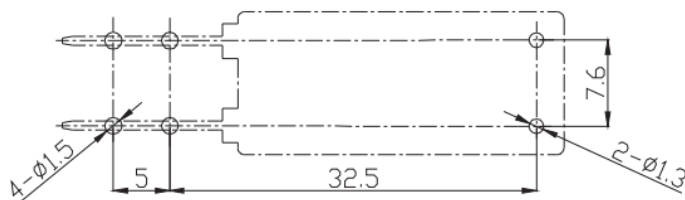


1A/1B 安装孔位图 (底视图)
1A/1B P.C.B. Layout (bottom view)

典型用途 Typical Applications

◇ 家用电器、洗衣机、空调、微波炉、音响、显示器、工业控制仪等

Home appliances, washing machine, air-conditioning, microwave oven, sound, monitor, industrial control instrument, etc.

性能曲线图 Characteristic Curves

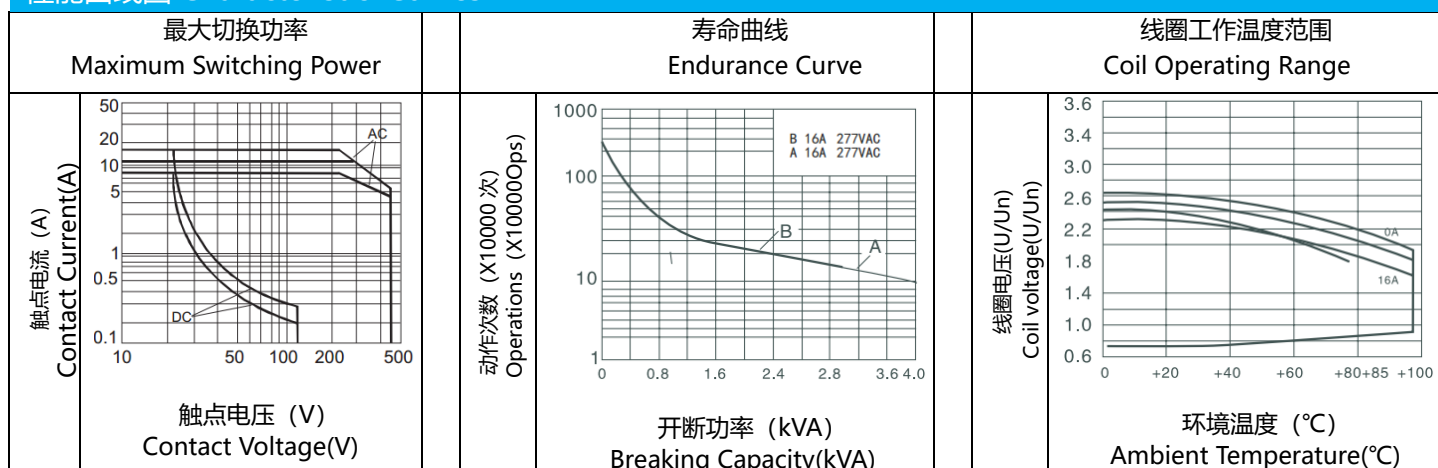

声明：本产品规格书仅供客户使用时参考，若有更改，恕不另行通知。

对三友而言，不可能评定继电器在每个具体应用领域的所有性能参数要求，因而客户应该根据具体的使用条件选择与之相匹配的产品。对于密封继电器在安装清洗后，使用前请打开外壳上的透气孔。如有疑问，请与三友联系获取更多的技术支持。但产品选型责任仅由客户负责。

Disclaimer: This datasheet is the customers' reference. All the specification are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should in a right position to choose the suitable product for their own application. For sealed relays after installation and cleaning, please open the vent hole on the case before use. If there is any query, please contact Sanyou for the technical service. However it is the user's responsibility to determine which product should be used only.