

## Features:

- Low coil power consumption.
- Micro-miniature relay, standard PCB terminals.
- IEC60335-1 compliant product is available.

## Safety certificate:

- Home appliances: air conditioner, heater, etc.
- Vending machine.
- Office equipment: computer, fax machine, etc.
- Electric controlled window, car antenna, door lock, etc.

## Approvals

UL、c-UL (File No.): E179745

TUV (File No.): R50148605

CQC (File No.): CQC05001014267, CQC12002072618



## Contact Data

|                               |                                |
|-------------------------------|--------------------------------|
| Contact arrangement           | 1form A( NO)                   |
| Rated voltage                 | 277VAC                         |
| Max.switching voltage         | 277VAC                         |
| Rated current                 | 16A                            |
| Min. recommended contact load | 1A, 6VDC                       |
| Breaking capacity max.        | 4432VA                         |
| Contact material              | AgSnO <sub>2</sub>             |
| Frequency of operation        | 360 ops./h                     |
| Operate/release time max.     | 20ms/10ms                      |
| Electrical endurance          | See electrical endurance graph |

## Contact ratings

| Type                     | Contact | Load                   | Cycles              |
|--------------------------|---------|------------------------|---------------------|
| <b>UL 60947-4-1</b>      |         |                        |                     |
| SMH                      | A(NO)   | 16A,277VAC,cos φ=1,85℃ | 1X10 <sup>5</sup>   |
| SMH                      | A(NO)   | TV-8, 120 VAC, 70℃     | 2.5X10 <sup>4</sup> |
| <b>GB/T 21711.1-2023</b> |         |                        |                     |
| SMH                      | A(NO)   | 16A,277VAC,85℃         | 2X10 <sup>4</sup>   |
| <b>EN 60730-1</b>        |         |                        |                     |
| SMH                      | A(NO)   | 16A,277VAC,85℃         | 1X10 <sup>5</sup>   |
| Mechanical endurance     |         |                        | ≥1x10 <sup>7</sup>  |

## Coil Data

|                                     |            |
|-------------------------------------|------------|
| Coil voltage range:                 | 5 to 48VDC |
| Operative range, IEC 61810          | 2          |
| Coil insulation system according UL | ClassB, F  |

## Coil Data (continued)

| Coil versions, DC coil |                     |                     |                           |                      |
|------------------------|---------------------|---------------------|---------------------------|----------------------|
| Rated voltage VDC      | Operate voltage VDC | Release voltage VDC | Coil resistance Ω (1±10%) | Rated coil powers mW |
| 5                      | ≤3.75               | ≥0.25               | 50                        | 500                  |
| 6                      | ≤4.5                | ≥0.3                | 72                        | 500                  |
| 9                      | ≤6.75               | ≥0.45               | 162                       | 500                  |
| 12                     | ≤9                  | ≥0.6                | 288                       | 500                  |
| 18                     | ≤13.5               | ≥0.9                | 648                       | 500                  |
| 24                     | ≤18                 | ≥1.2                | 1152                      | 500                  |
| 48                     | ≤33.8               | ≥2.4                | 4608                      | 500                  |

All figures are given for coil without pre-energization, at ambient temperature 20℃


## Insulation Data

|                                      |                |
|--------------------------------------|----------------|
| Initial dielectric strength          |                |
| between open contacts                | 1000VAC        |
| between contact and coil             | 5000VAC        |
| Clearance/creepage                   |                |
| between contact and coil (Clearance) | ≥8.0mm(actual) |
| between contact and coil(Creepage)   | ≥8.0mm(actual) |
| Material group of insulation parts   |                |
| Tracking index of relay base         |                |
| PTI 175V/PTI 250V                    |                |


## Other Data

|   |                   |
|---|-------------------|
| Material compliance: EU RoHS/ELV, China RoHS, REACH |                   |
| Ambient temperature                                 | -40℃ to +85℃      |
| Category of environmental protection                | RTII - flux proof |
| IEC 61810   |                   |
| Weight  | Approx. 15.8g     |
| Resistance to soldering heat THT (IEC 60068-2-20)   | 260℃/5s           |
| Packaging/unit                                      | tube, tray        |


Coil Temp. Rise



Operate/Release time



Endurance Curve




Note:

- (1) . Test conditions: room temperature, flux-proof product, resistive load, 1s on, 9s off.
- (2) . The above curves are for reference only, and the final result is subject to the experiment.


Dimension

Standard type

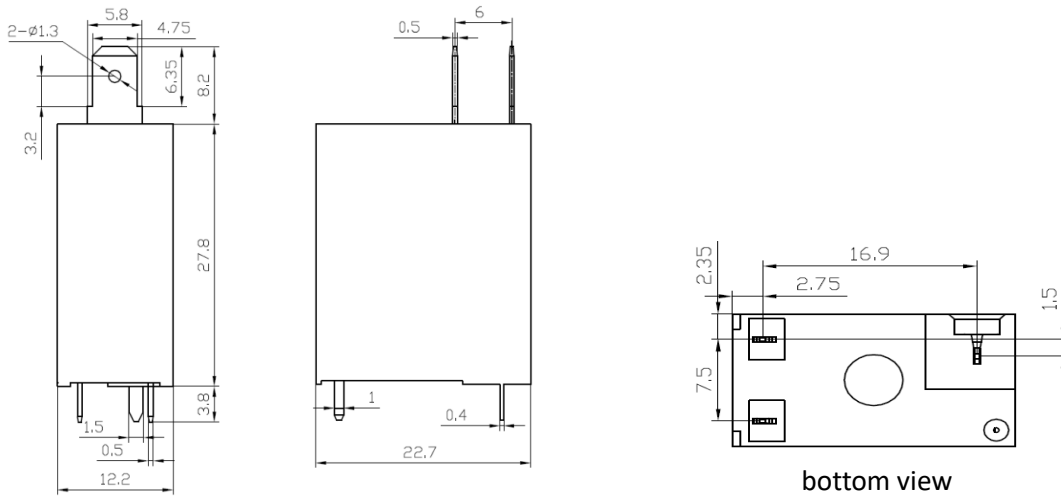


bottom view

PCB type

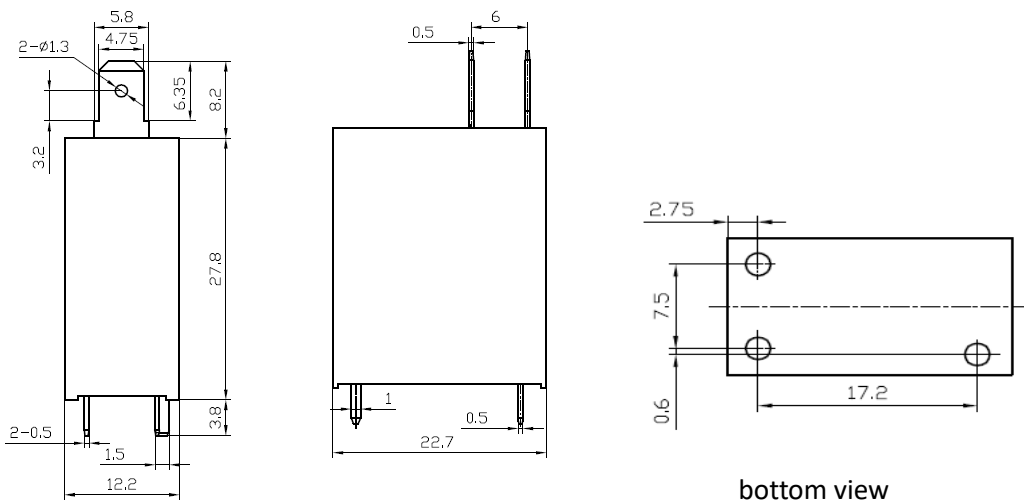

bottom view

Special type

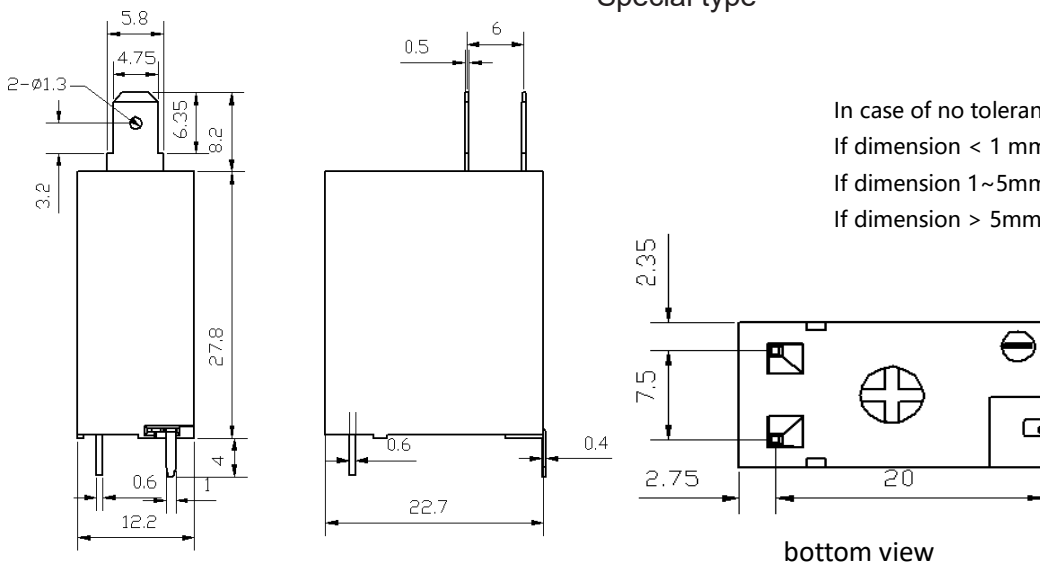


bottom view

In case of no tolerance shown on outline dimension  
 If dimension < 1 mm, tolerance:  $\pm 0.2\text{mm}$   
 If dimension 1~5mm, tolerance:  $\pm 0.3\text{mm}$   
 If dimension > 5mm, tolerance:  $\pm 0.4\text{mm}$

Connection diagrams (bottom view)

Standard type

PCB type

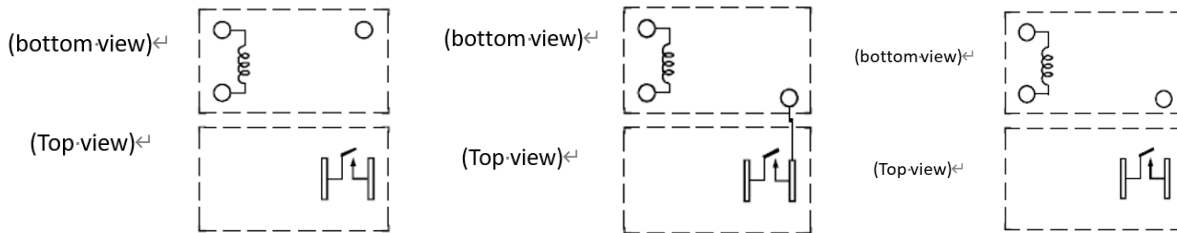


Connection diagrams (bottom view)

Standard type

PCB type

Special type

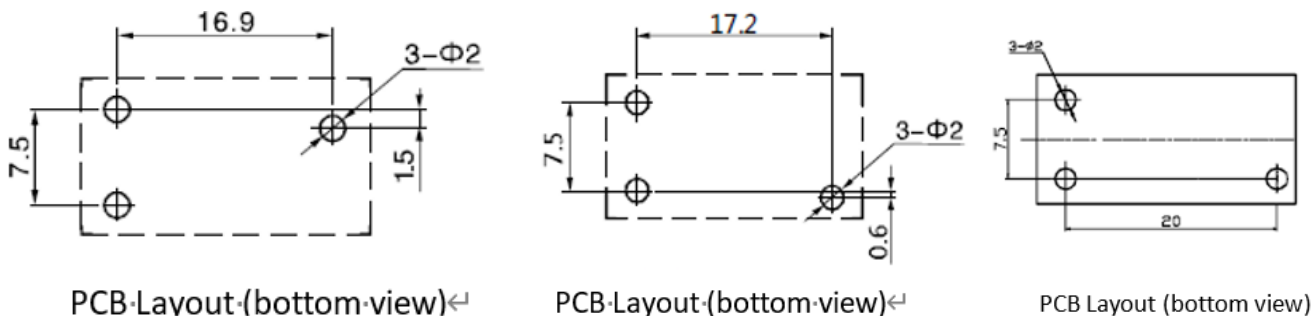

Note:

- 1.The dimension of pin is the size before tinning
- 2.Tolerance of PCB layout:  $\pm 0.1$  mm.

Product code structure

|            |            |           |          |          |          |            |            |   |
|------------|------------|-----------|----------|----------|----------|------------|------------|---|
| <b>SMH</b> | <b>- 1</b> | <b>12</b> | <b>D</b> | <b>M</b> | <b>P</b> | <b>- F</b> | <b>-XX</b> | <p>Special Parameter : Nil-Standard , 01- operate time :7.2ms;<br/>02- operate time :7.2ms pinning on drawing</p> <p>Insulation System: Nil-Standard, B-Class B, F-Class F</p> <p>Contact material: Nil-Standard, P-PCB,<br/>Letter or number-Special requirement</p> <p>Contact Arrangement: M-Form A</p> <p>Coil power: D-0.5W</p> <p>Rated coil voltage(VDC): 05,06,09,12,18,24,48</p> <p>Number of poles : 1-1Pole</p> <p>Type: SMH</p> |
|------------|------------|-----------|----------|----------|----------|------------|------------|---|

- (1) . Flux-proofed relays can not be used in the environment with pollutants like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.
- (2) . Water cleaning or surface process is not suggested after the flux-proofed relays are assembled on PCB.
- (3) . Special requirements of customers (XX) shall be evaluated by our company and marked by characteristic symbols.
- (4) . C1 suffix stands for product Compliant with IEC60335-1& CTI250V.

## Examples of ordering codes

SMH-112DM      relay SMH , Flux-proof , rated DC voltage 12V ,coil power 0.5W,1NO,and contact material AgSnO<sub>2</sub>.

## Disclaimer

The specification is for reference only. Specifications are subject to change without prior notice.

We could not evaluate all the performance and all the parameters for every possible applications. Thus the users should in a right position to choose suitable product for their own application. For sealed relays, after installation and cleaning, please open the ventilation hole in the case before use. If there is any query, please contact Sanyou for technical services. However it is the user's responsibility to determine which product should be used.