

Features:

- High contact capability: 16A switching capability.
- Small size, 15.7mm high
- Vertical or Horizontal quick terminal output.
- Creepage distance ≥ 10 mm, IP /OP 5,000V.
- Withstand surge voltage of 10KV.
- Compliant with IEC60335-1(GWT) & CTI250V
- Ambient temperature range -40°C ~ 105°C, -40°C ~ 125°C (confirmed by VDE only).

Typical applications:

- Home appliances, washing machine, air-conditioning, etc.
- Microwave oven, sound, monitor, etc.
- Industrial control instrument, etc.

Approvals

UL, c-UL (File No.): E179745
CQC (File No.): CQC13002089403
VDE (File No.): 40031353

Contact Data

Contact arrangement	1 form A(NO) or 1 form B(NC)
Rated voltage	277VAC
Max. switching voltage	277VAC
Rated current	16A
Min. recommended contact load	1A, 6VDC
Breaking capacity max.	4432VA
Contact material	AgNi, AgSnO ₂
Frequency of operation	360 ops./h
Operate/release time max.	15ms/10ms
Electrical endurance	See electrical endurance graph

Contact ratings

Type	Contact	Load	Cycles
IEC 61810	EN 60730-1		
SMF-DM(1)	A(NO)	16A, 277VAC, $\cos \phi=1$, 105°C	7X10 ⁴
SMF	A/B(NO/NC)	16A, 277VAC, $\cos \phi=1$, 125°C	3X10 ⁴
SMF	A/B(NO/NC)	10A, 400VAC, $\cos \phi=1$, 105°C	1X10 ⁵
SMF-DB1	B(NC)	16A, 277VAC, $\cos \phi=1$, 105°C	5X10 ⁴
SMF-DB	B(NC)	16A, 277VAC, $\cos \phi=1$, 105°C	4X10 ⁴
SMF	A(NO)	10A 400VAC, $\cos \phi=1$, 105°C	1X10 ⁵


UL 60947-4-1

SMF	A/B(NO/NC)	16A, 250VAC, $\cos \phi=1$, 105°C	1X10 ⁵
GB/T 21711.1-2023			
SMF	A/B(NO/NC)	16A, 250VAC, $\cos \phi=1$, 105°C	2X10 ⁴

Mechanical endurance	$\geq 1 \times 10^7$
----------------------	----------------------

Coil Data

Coil voltage range:	5 to 110VDC
Operative range, IEC 61810	2
Coil insulation system according UL	Class F

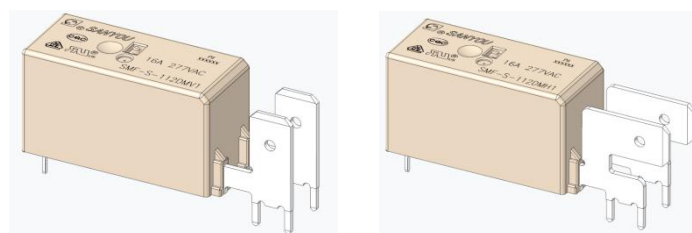

Coil Data(continued)

Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω (1 $\pm$ 10%)	Rated coil powers mW
5	≤ 3.75	≥ 0.25	62.5	400
6	≤ 4.5	≥ 0.3	90	400
9	≤ 6.75	≥ 0.45	202.5	400
12	≤ 9	≥ 1.6	360	400
18	≤ 13.5	≥ 1.9	810	400
24	≤ 18	≥ 1.2	1440	400
48	≤ 36	≥ 2.4	5760	400
60	≤ 45	≥ 3	8570	400
110	≤ 82.5	≥ 5.5	28800	400




All figures are given for coil without pre-energization, at ambient temperature 20°C

Insulation Data

Initial dielectric strength	
between open contacts	1000VAC
between contact and coil	5000VAC
Clearance/Creepage	
between contact and coil (Clearance)	≥ 10 mm(actual)
between contact and coil (Creepage)	≥ 10 mm(actual)
Material group of insulation parts	IIIa
Tracking index of relay	PTI 175V/PTI 250V


Other Data

Material compliance:	EU RoHS/ELV, China RoHS, REACH,
Ambient temperature:	-40°C to +105°C
Category of environmental protection	
IEC 61810	RTII - flux proof RTIII - Sealed type washable
Weight	Approx. 15.5g
Resistance to soldering heat THT (IEC 60068-2-20)	260°C/5s
Packaging/unit	tube, tray

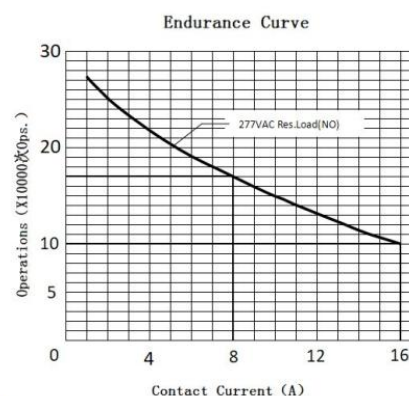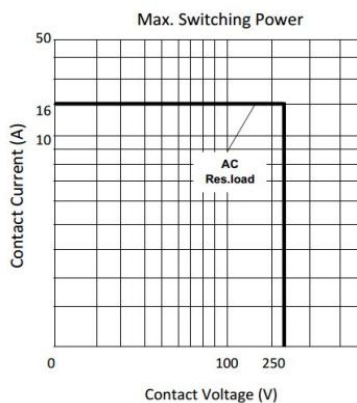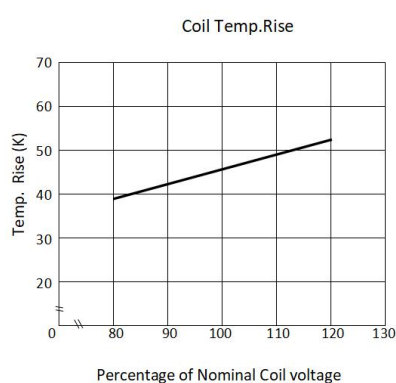


Note:
(1) Test conditions: room temperature, flux-proof product, resistive load, 1s on, 9s off.
(2) The above curves are for reference only, and the final result is subject to the experiment

Dimensions

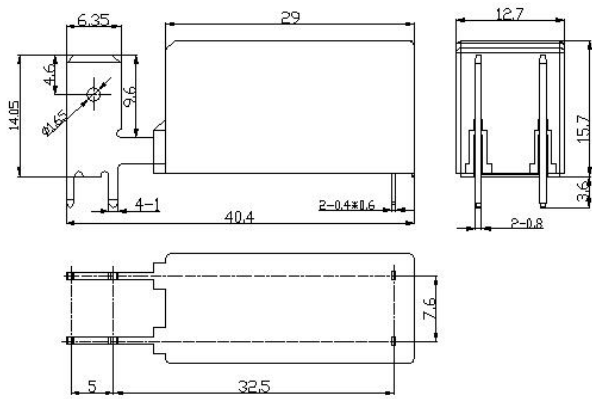


Vertical quick terminal

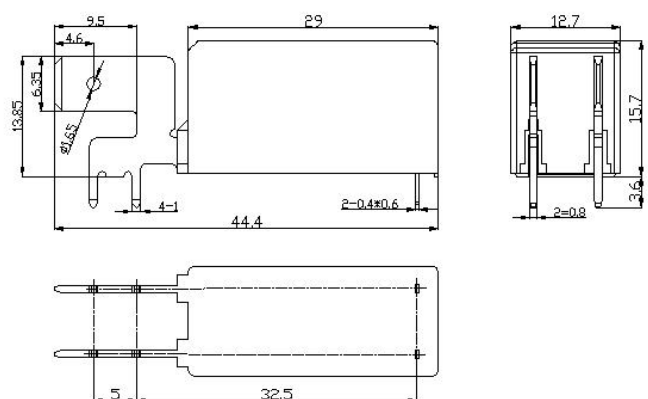


Horizontal quick terminal

Wiring Diagrams (bottom view)

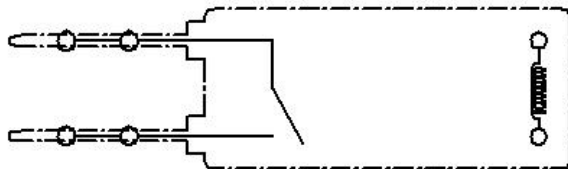


1A Wiring Diagram (bottom view)

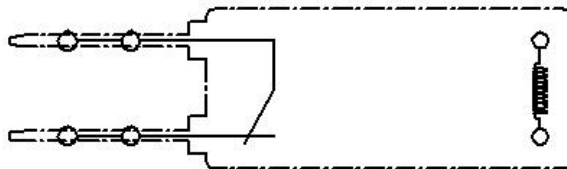

1B Wiring Diagram (bottom view)

PCB Layouts (bottom view)

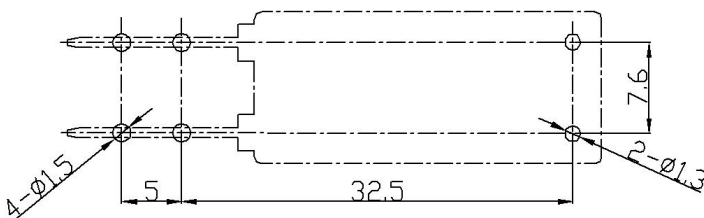

In case of no tolerance shown on outline dimension
 If dimension < 1 mm, tolerance: $\pm 0.2\text{mm}$
 If dimension 1~5mm, tolerance: $\pm 0.3\text{mm}$
 If dimension > 5mm, tolerance: $\pm 0.4\text{mm}$

Notes:

1. The dimension of pin is the size before tinning
2. Tolerance of PCB layout: $\pm 0.1\text{ mm}$.

Product Code Structure

SMF	-S	-1	12	D	M	V	1	-F	-XX	
										Special Parameter:
										Nil-Standard type;
										Letters or Numbers-Special requirements
										Insulation System:
										Nil-Standard
										B-Class B
										F-Class F
										Contact Material:
										Nil-AgNi
										1-AgSnO ₂
										Terminal Form:
										V- Vertical quick terminal
										H-Horizontal quick terminal
										Arrangement:
										M-Form A
										B-Form B
										Coil Power:
										D-0.4W
										Rated Coil Voltage (VDC) :
										05, 06, 09, 12, 18, 24, 48, 60, 110
										Number of Poles:
										1-1 Pole
										Protective Construction:
										S- Flux-proofed
										SH- Sealed type washable
										Type: SMF

(1) Flux-proof relays can not be used in polluted environment (containing H₂S, SO₂, NO₂, dust and other pollutants).

(2) Water cleaning or surface process is not suggested after the flux-proofed relays are assembled on PCB.

(3) Special requirements of customers (XX) shall be evaluated by our company and marked by characteristic symbols.

Examples of Ordering Codes

SMF-S-112DMV1 relay SMF, Flux-proof, rated DC voltage 12V, coil power 0.4W, 1NO, and contact material AgSnO₂.

SMF-S-112DBV1 relay SMF, Flux-proof, rated DC voltage 12V, coil power 0.4W, 1NC, and contact material AgSnO₂.

Disclaimer

The specification is for reference only. Specifications are subject to change without prior notice.

We could not evaluate all the performance and all the parameters for every possible applications. Thus the users should in a right position to choose suitable product for their own application. For sealed relays, after installation and cleaning, please open the ventilation hole in the case before use. If there is any query, please contact Sanyou for technical services. However it is the user's responsibility to determine which product should be used.