

Features:

- Suitable for the pre-charging system of new energy vehicles
- Rated 40A contact switching capability
- Optional PCB/QC terminal installation
- The housing is available in standard mounting and flange mounting options
- Meets UL safety certification: E179745



Contact Data

Contact arrangement	1 Form A
Contact material	AgSnO2
Contact Resistance	≤5mΩ (@6V 20A)
Contact Rating (resistive load)	40A 450VDC
Max. Contact Voltage	800VDC (@2A)
Operate Time (at nominal volt.)	≤30ms
Release Time (at nominal volt.)	≤10ms
Bounce time (at nominal volt.)	≤5ms
Capacitive connection endurance ⁽¹⁾	1×10 ³ ops(200A 750VDC)
Resistive switching endurance ⁽²⁾	3×10 ³ ops(40A 450VDC)
Resistive connection endurance ⁽³⁾	1×10 ⁵ ops(40A 450VDC) 7.5×10 ⁴ ops(40A 1000VDC)
Current carrying capacity ⁽⁴⁾	40A: continue
	60A: 1h
	80A: 20min
	160A: 30s
	240A: 10s 400A: 0.6s

Note:

- (1) @23°C, 750VDC, t=1ms, impact 200A, steady state 40A.
(2) @23°C, on: off=0.6s: 5.4s, and the copper bar cross-section is 6mm².
(3) @23°C, on: off=0.6s: 5.4s, and the copper bar cross-section is 6mm².
(4) @65 °C, copper bar cross-section 6mm².

Coil Data

Nominal Voltage VDC	Max. Operate Voltage VDC	Min. Release Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance (1±10%) Ω	Coil Power W	Holding Voltage
12	7.2	1.2	18	55.4	2.6	35% to 80% Nomi. Volt.(at 23°C)
24	14.4	2.4	36	222		40% to 60% Nomi. Volt.(at 85°C)
48	28.8	4.8	72	886		

Note:

- (1) To prevent the coil from overheating, do not continuously apply the maximum voltage for an extended period.
(2) The coil holding voltage is the voltage applied to coil 100ms after the rated voltage

Insulation Data

Insulation resistance	1000MΩ (500VDC)
Initial dielectric strength(Leakage current ≤ 1mA)	
Between open contacts	3000VAC,50/60Hz,1min
Between contact and coil	3000VAC,50/60Hz,1min

Other Data

Material compliance	EU RoHS/ELV, China RoHS, REACH
Temperature rise	< 75K, @40A, 65°C (copper bar cross-section 6mm ²)
Shock resistance	Functional 50G Destructive 100G
Vibration resistance	10~2000Hz, 57.9m/s ²
Mechanical endurance	5×10 ⁵ ops
Ambient temperature	-40°C to +85°C
Humidity	5% to 85%RH
Terminal Configuration	PCB, QC
Weight	< 50g
Noise	50dB (1m)
Protection Degree	Optional water trial type



Note: The above values are initial values

Safety certification

Certification	Certificate Number	Authentication load
UL	E179745	450VDC 40A



Dimensions

QC ordinary shell type

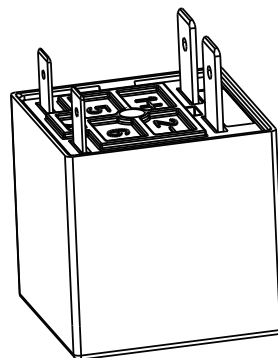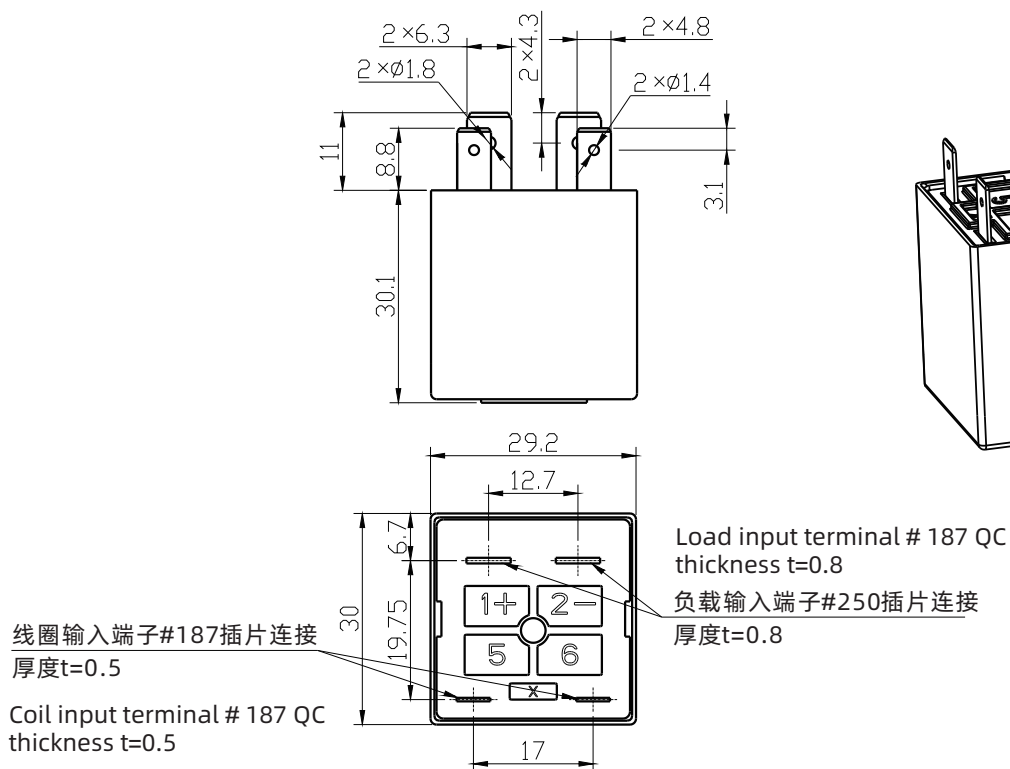

Size tolerance:
 ≤ 10 mm, tolerance is ± 0.3 mm
 $10 \sim 50$ mm, tolerance is ± 0.5 mm
 ≥ 50 mm, tolerance is ± 0.8 mm


PCB ordinary shell type

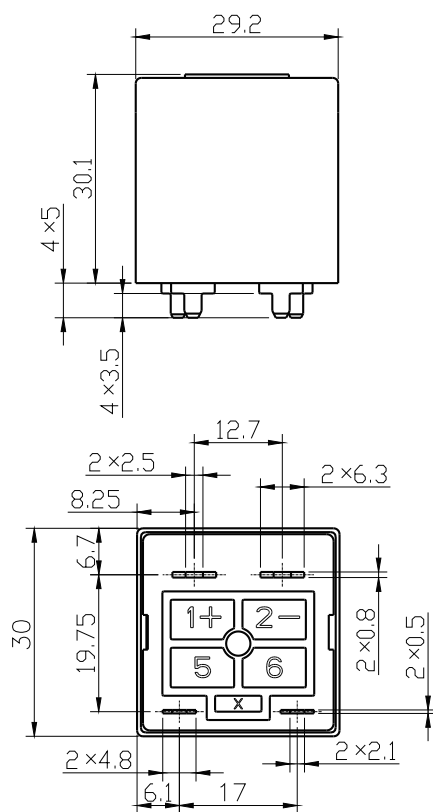

Size tolerance:
 ≤ 10 mm, tolerance is ± 0.3 mm
 $10 \sim 50$ mm, tolerance is ± 0.5 mm
 ≥ 50 mm, tolerance is ± 0.8 mm


Dimensions

G-type shell

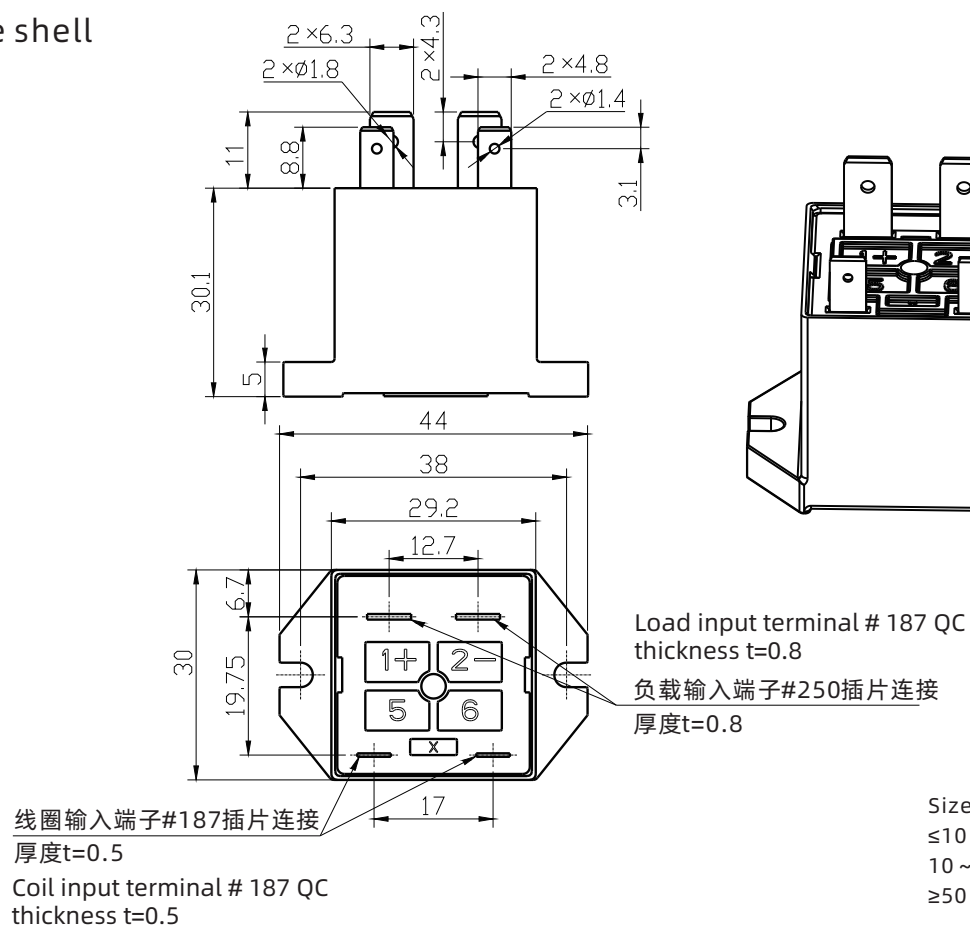

Size tolerance:
 ≤10 mm, tolerance is ±0.3 mm
 10 ~ 50 mm, tolerance is ±0.5 mm
 ≥50 mm, tolerance is ±0.8 mm


G2-type shell

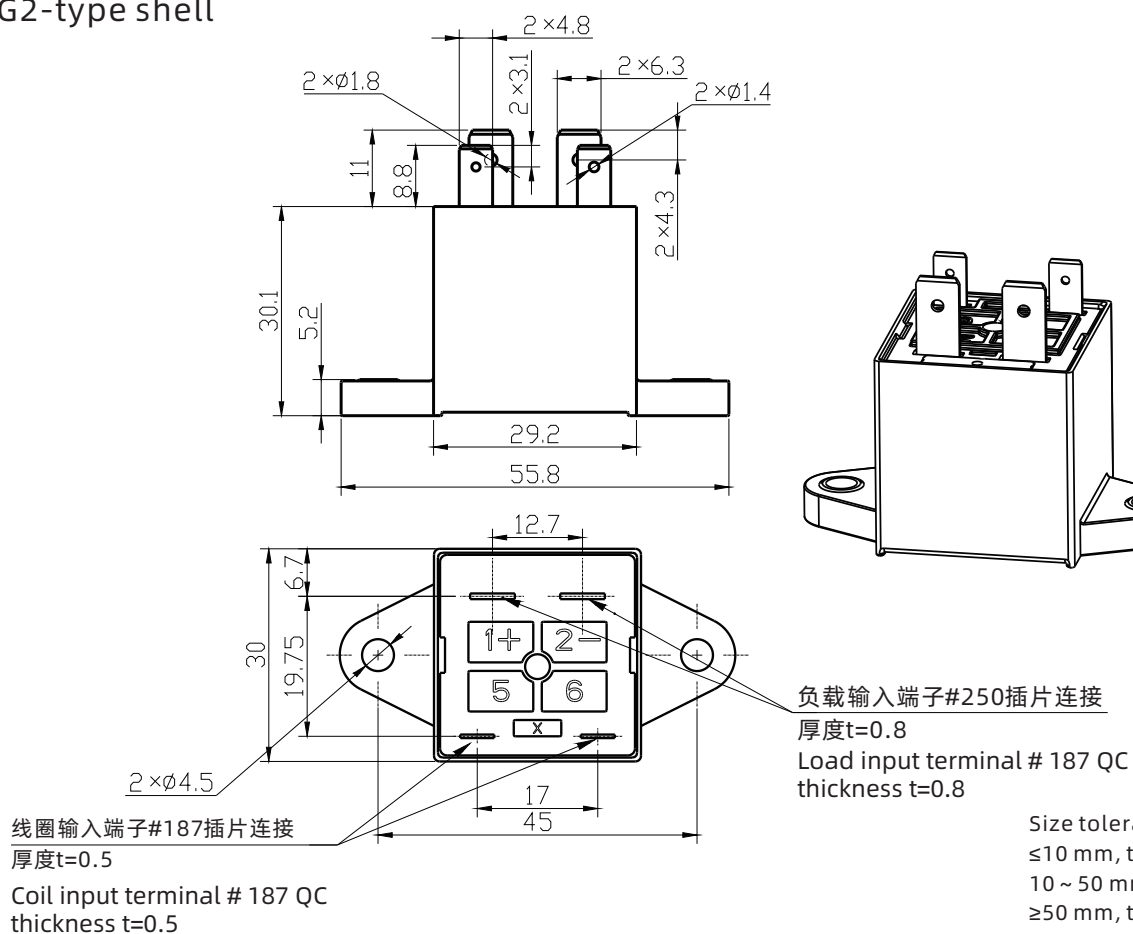

Size tolerance:
 ≤10 mm, tolerance is ±0.3 mm
 10 ~ 50 mm, tolerance is ±0.5 mm
 ≥50 mm, tolerance is ±0.8 mm

Dimensions

G3-type shell


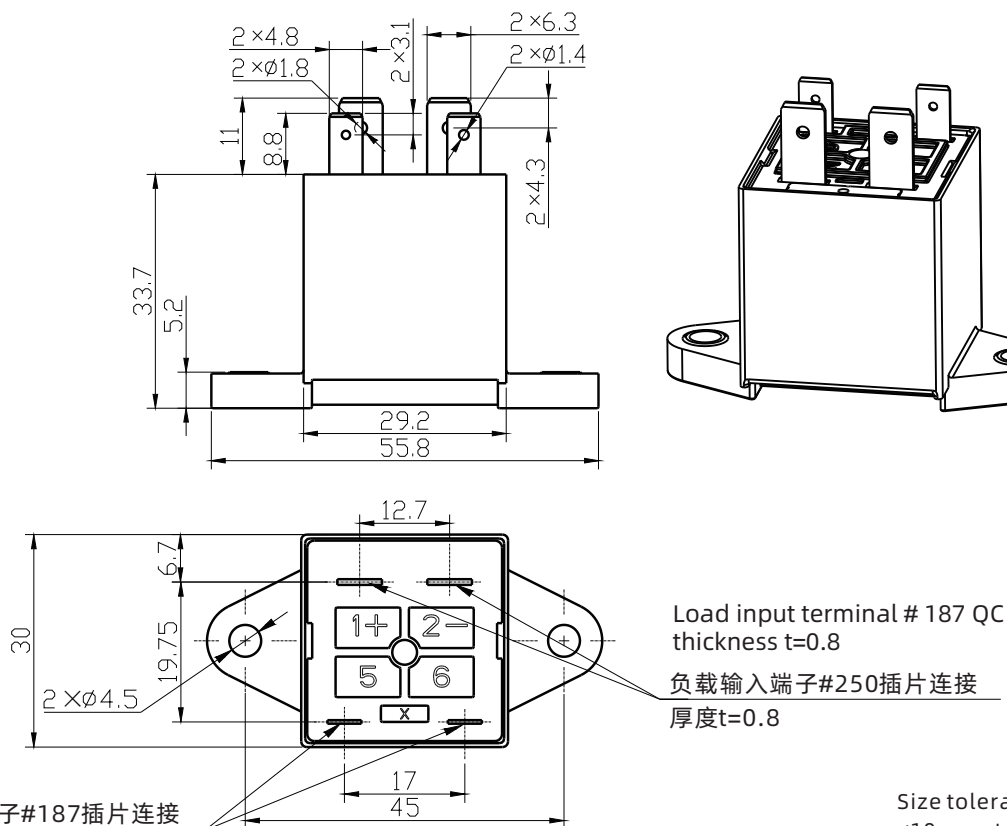


线圈输入端子#187插片连接
厚度t=0.5

Coil input terminal # 187 QC
thickness t=0.5

Size tolerance:
≤10 mm, tolerance is ±0.3 mm
10 ~ 50 mm, tolerance is ±0.5 mm
≥50 mm, tolerance is ±0.8 mm

PCB pin hole design, Schematic diagram

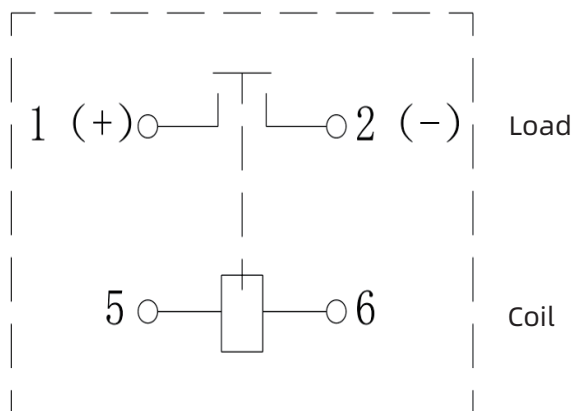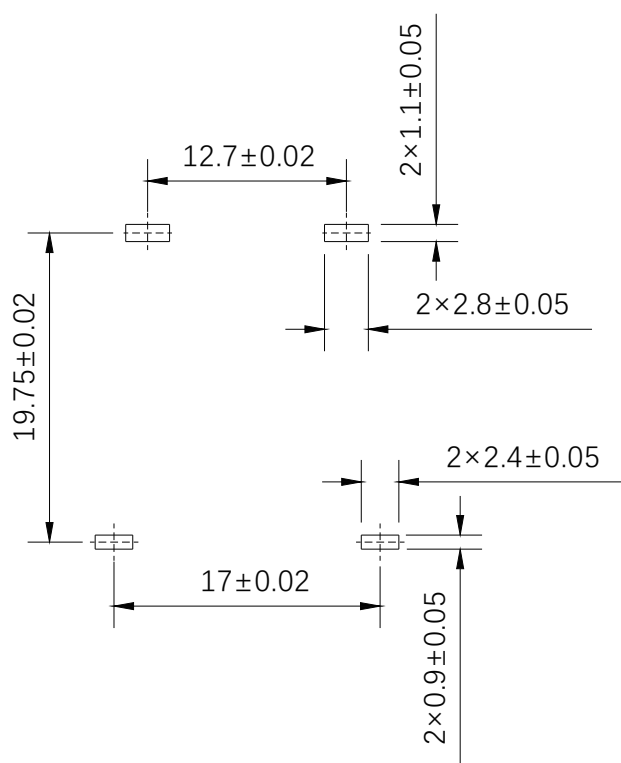


Note: The SEF40 series coils have no polarity,
but the load has polarity

Product Code Structure

SEF40S	-S	-M	12	P	X	XX	
							Special parameters: Nil-Standard type, Letters or digits-Special requirement
							Shell type: Nil-Ordinary shell, G. G2, G3: Corresponding to special shell types
							Terminal type: Nil- Quick connect terminal P: PCB terminal
							Coil voltage(VDC): 12, 24, 48
							Contact form:M-Form A
							Sealing form: S-Plastic sealed type SH-Trial water type
							Model:SEF40S

Note:The customer's special requirements need to be formulated together with Sanyou.

Current carrying curve

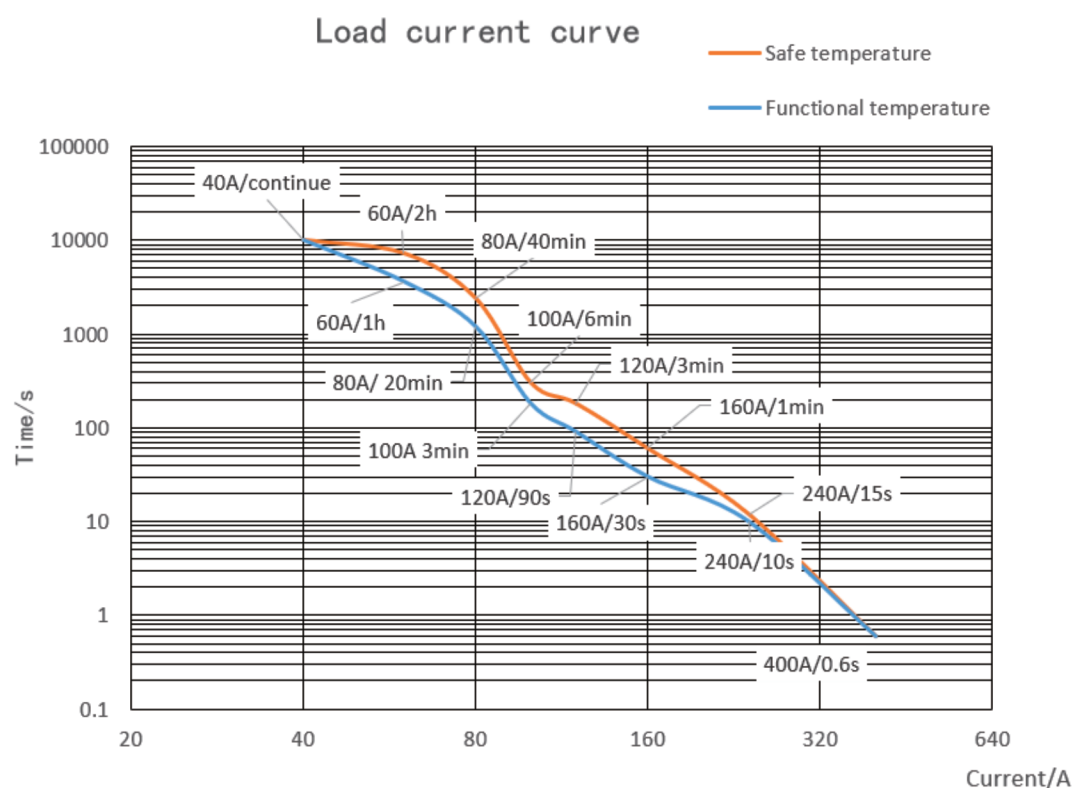

Disclaimer

This product specification is for reference only, subject to change without prior notice. It is not possible for Sanyou to evaluate all the performance parameter requirements of relays in each specific application field, so customers should choose the suitable product according to the specific application conditions. If you have any questions, please contact us for more technical support, but the customer should be responsible for product selection.