

Features:

- Low coil power consumption.
- Micro-miniature relay, standard PCB terminals.
- IEC60335-1 compliant product is available.
- IEC60079-15 compliant product is available.

Typical applications:

- Home appliances: air conditioner, heater, etc.
- Vending machine.
- Office equipment: computer, fax machine, etc.
- Electric controlled window, car antenna, door lock, etc.


Approvals

UL, c-UL (File No.): E190598

TUV (File No.): R50227999

CQC (File No.): CQC07001018779, CQC22002367721

VDE (File No.): 40034054

Contact Data

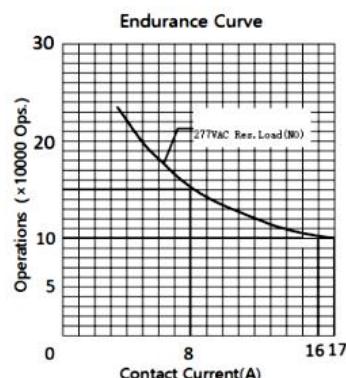
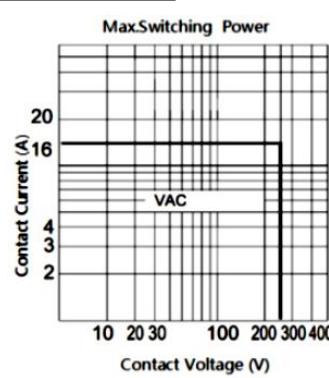
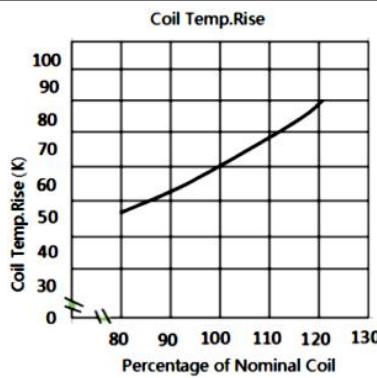
Contact arrangement	1form C(CO)or 1form A(NO)
Rated voltage	250VAC
Max.switching voltage	277VAC
Rated current	16A/17A
Min. recommended contact load	1A, 6VDC
Breaking capacity max.	4709VA
Contact material	AgSnO ₂ , AgNi&AgSnO ₂
Frequency of operation	360 ops./h
Operate/release time max.	15ms/5ms
Electrical endurance	See electrical endurance graph

Contact ratings

Type	Contact	Load	Cycles
IEC 61810			
SMIH(0.54W)	A/C(NO)	16A,250VAC,cos φ=1,105°C	5X10 ⁴
SMIH(0.54W)	A/C(NO)	17A,277VAC,cos φ=1,105°C	5X10 ⁴
SMIH(0.72W)	A/C(NO)	16A,250VAC,cos φ=1,95°C	5X10 ⁴
SMIH(0.72W)	A/C(NO)	17A,277VAC,cos φ=1,95°C	5X10 ⁴
UL 60947-4-1			
SMIH	A/C(NO)	16A,250VAC,cos φ=1,85°C	1X10 ⁵
SMIH	A/C(NO)	17A,277VAC,cos φ=0.75-0.8,105°C	1X10 ⁵
SMIH	A/C(NO)	1/3 hp,120VAC,85°C	3X10 ⁴
SMIH	A/C(NO)	TV-8,240VAC,80°C	2.5X10 ⁴
GB/T 21711.1-2023			
SMIH	A/C(NO)	16A,250VAC,105°C	2X10 ⁴
SMIH	A/C(NO)	17A,250VAC,105°C	2X10 ⁴
EN 60730-1			
SMIH	A/C(NO)	16A,250VAC,85°C	1X10 ⁵
SMIH	A/C(NO)	17A,277VAC,105°C	1X10 ⁵
Mechanical endurance			≥1x10 ⁷

Coil Data

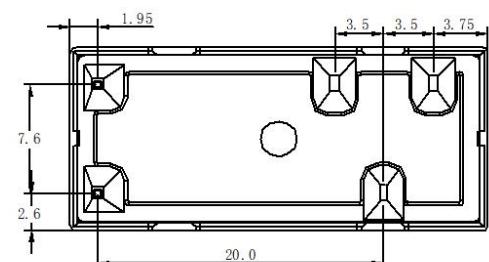
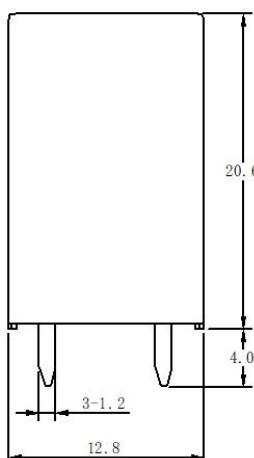
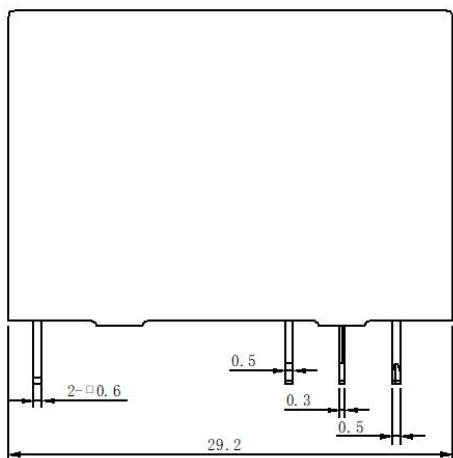
Coil voltage range:	5 to 48VDC
Operative range, IEC 61810	2
Coil insulation system according UL	Class F



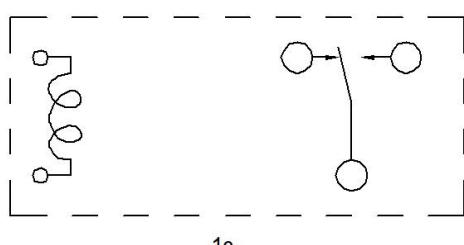
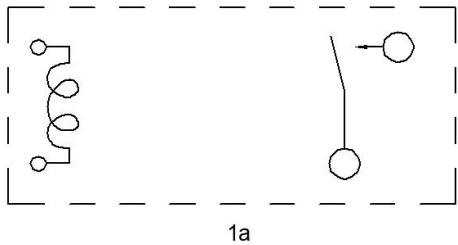
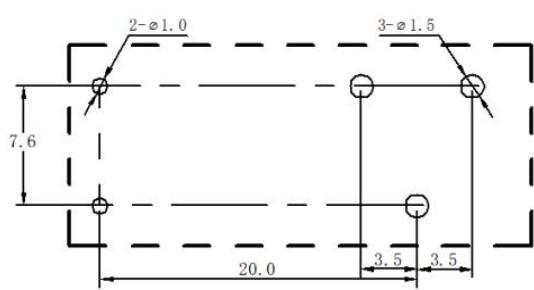
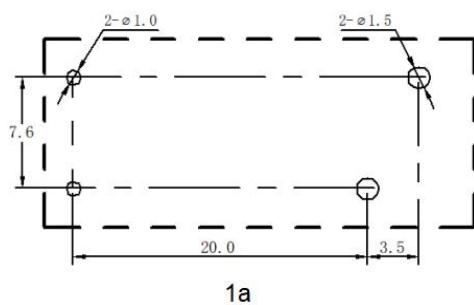
Note:

(1)Test conditions: room temperature, flux-proof product,Resistive load, 1s on:9s off.

(2)The above curves are for reference only, and the final result is subject to the experiment.

Dimensions


(bottom view)

Wiring Diagrams (bottom view)

PCB Layouts (bottom view)


In case of no tolerance shown on outline dimension

If dimension < 1 mm, tolerance: ± 0.2 mm

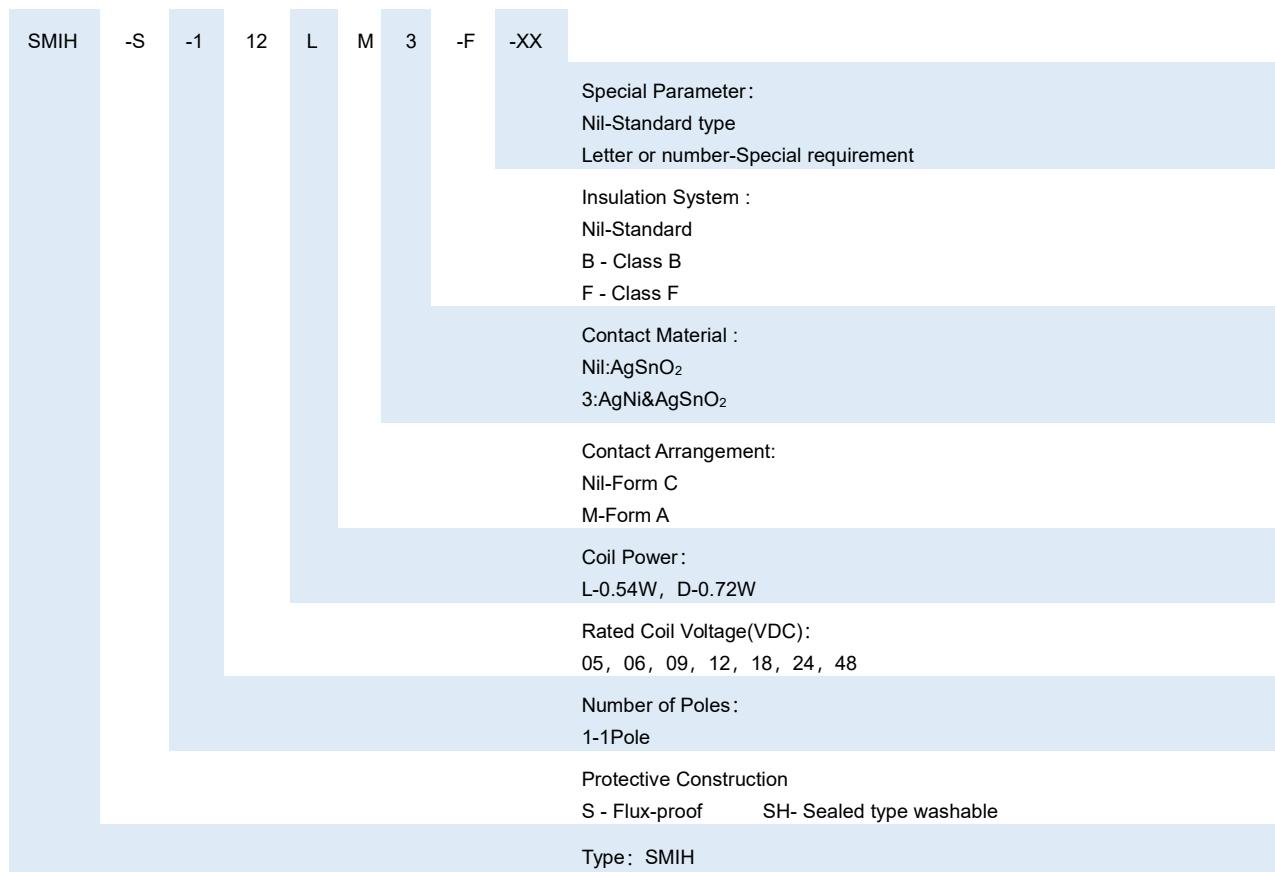
If dimension 1~5mm, tolerance: ± 0.3 mm

If dimension > 5mm, tolerance: ± 0.4 mm

Notes:

1.The dimension of pin is the size before tinning

2.Tolerance of PCB layout: ± 0.1 mm.

Product Code Structure


- (1) Flux-proof relays can not be used in the environment with pollutants like H₂S, SO₂, NO₂, dust, etc.
- (2) Water cleaning or surface process is not suggested after the flux-proof relays are assembled on PCB.
- (3) Customized special suffix is available after being evaluated by Sanyou.
- (4) C1 suffix stands for product in accordance to IEC60335-1(GWT) & CTI250V.
- (5) Ex suffix stands for product compliant with IEC60079-15.

Examples of Ordering Codes

SMIH-S-112LM relay SMIH, Flux-proof, rated DC voltage 12V, coil power 0.54W, 1NO, and contact material AgSnO₂

SMIH-S-112L relay SMIH, Flux-proof, rated DC voltage 12V, coil power 0.54W, 1CO, and contact material AgSnO₂

Disclaimer

The specification is for reference only. Specifications are subject to change without prior notice.

We could not evaluate all the performance and all the parameters for every possible applications. Thus the users should in a right position to choose suitable product for their own application. For sealed relays, after installation and cleaning, please open the ventilation hole in the case before use. If there is any query, please contact Sanyou for technical services. However it is the user's responsibility to determine which product should be used.