

**Features:**

- Miniature relay with high switching capability: 60A.
- Contact form: Form A, contact Gap 1.8mm or 2.3mm.
- 4000VAC dielectric strength high and 6000V surge voltage (1.2/50  $\mu$ s) between coil and contact.
- Compliant with IEC60335-1(GWT) & CTI250V

**Typical applications:**

- Photovoltaic controller.
- Charging pile.
- New energy automobile.


**Approvals**

UL, c-UL (File No.): E190598  
TUV(File No.): R50143450  
CQC (File No.): CQC02001002109, CQC10002050461, CQC21002306488

**Contact Data**

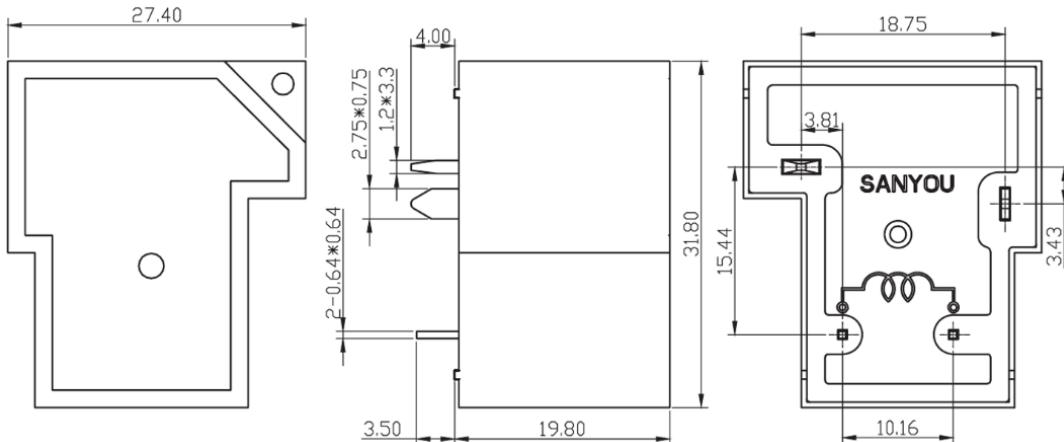
Contact arrangement	1Form A (NO)
Contact resistance	100m $\Omega$ Max.(at 1A 6VDC)
Rated voltage	277VAC
Max.switching voltage	315VAC
Rated current	60A
Min. recommended contact load	1A, 6VDC
Breaking capacity max.	18,900VA
Contact material	AgSnO2/AgNi
Frequency of operation	360 ops./h
Operate/release time max.	18ms/15ms
Electrical endurance	20A-60A-20A@277VAC,30,000 cycles

**Contact ratings**

Type	Contact	Load	Cycles
<b>IEC 61810</b>			
SLE	A(NO)	Pick-up 20A, carrying 60A, break 20A 277VAC,85°C	3X10 <sup>4</sup>
<b>UL 60947-4-1</b>			
SLE	A(NO)	Pick-up 20A, carrying 60A, break 20A 277VAC,85°C	3X10 <sup>4</sup>
<b>GB/T 21711.1-2023</b>			
SLE	A(NO)	Pick-up 20A, carrying 60A, break 20A 277VAC,85°C	3X10 <sup>4</sup>
Mechanical endurance			
			$\geq 3 \times 10^5$ operations

**Coil Data**

Coil voltage range:	5 to 24VDC
Operative range, IEC 61810	2
Coil insulation system according UL	Class F/Class H

**Dimensions**

**Coil Data(continued)**
**Coil versions, DC coil**

Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega$ (1±10%)	Rated coil powers mW
5	≤3.75	≥0.25	11.1	2250
6	≤4.5	≥0.30	16	2250
9	≤6.75	≥0.45	36	2250
12	≤9	≥0.60	64	2250
24	≤18	≥1.20	256	2250

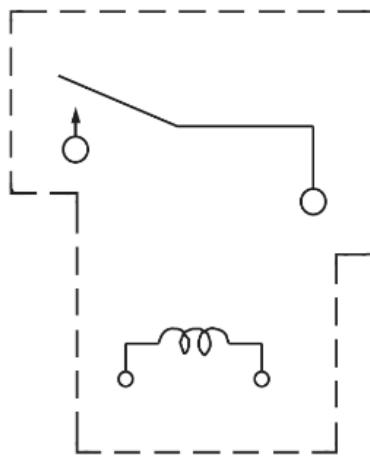
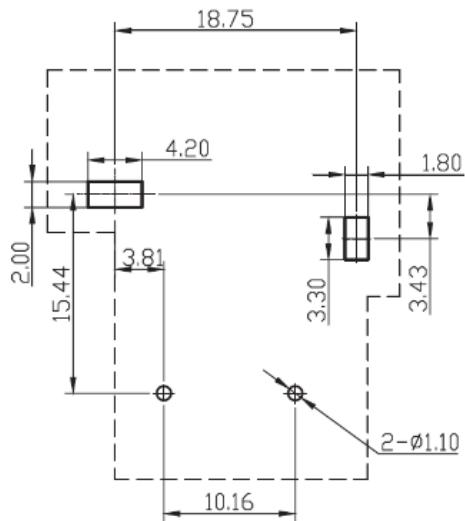
All figures are given for coil without pre-energization, at ambient temperature 20°C

**Insulation Data**

Initial dielectric strength between open contacts between contact and coil	2500VAC 4000VAC
Clearance/Creepage between contact and coil (Clearance) between contact and coil (Creepage)	≥3.5mm(actual) ≥5.0mm(actual)
Material group of insulation parts	IIIa
Tracking index of relay	PTI 250V

**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH	
Ambient temperature	-40°C to +85°C
Category of environmental protection	
IEC 61810	RTII - flux proof RTIII - Sealed type washable
Weight	Approx. 25.0g
Resistance to soldering heat THT (IEC 60068-2-20)	260°C/5s
Packaging/unit	tray

**Wiring Diagrams**

**PCB Layouts (bottom view)**


In case of no tolerance shown on outline dimension

If dimension < 1 mm, tolerance:  $\pm 0.2$ mm

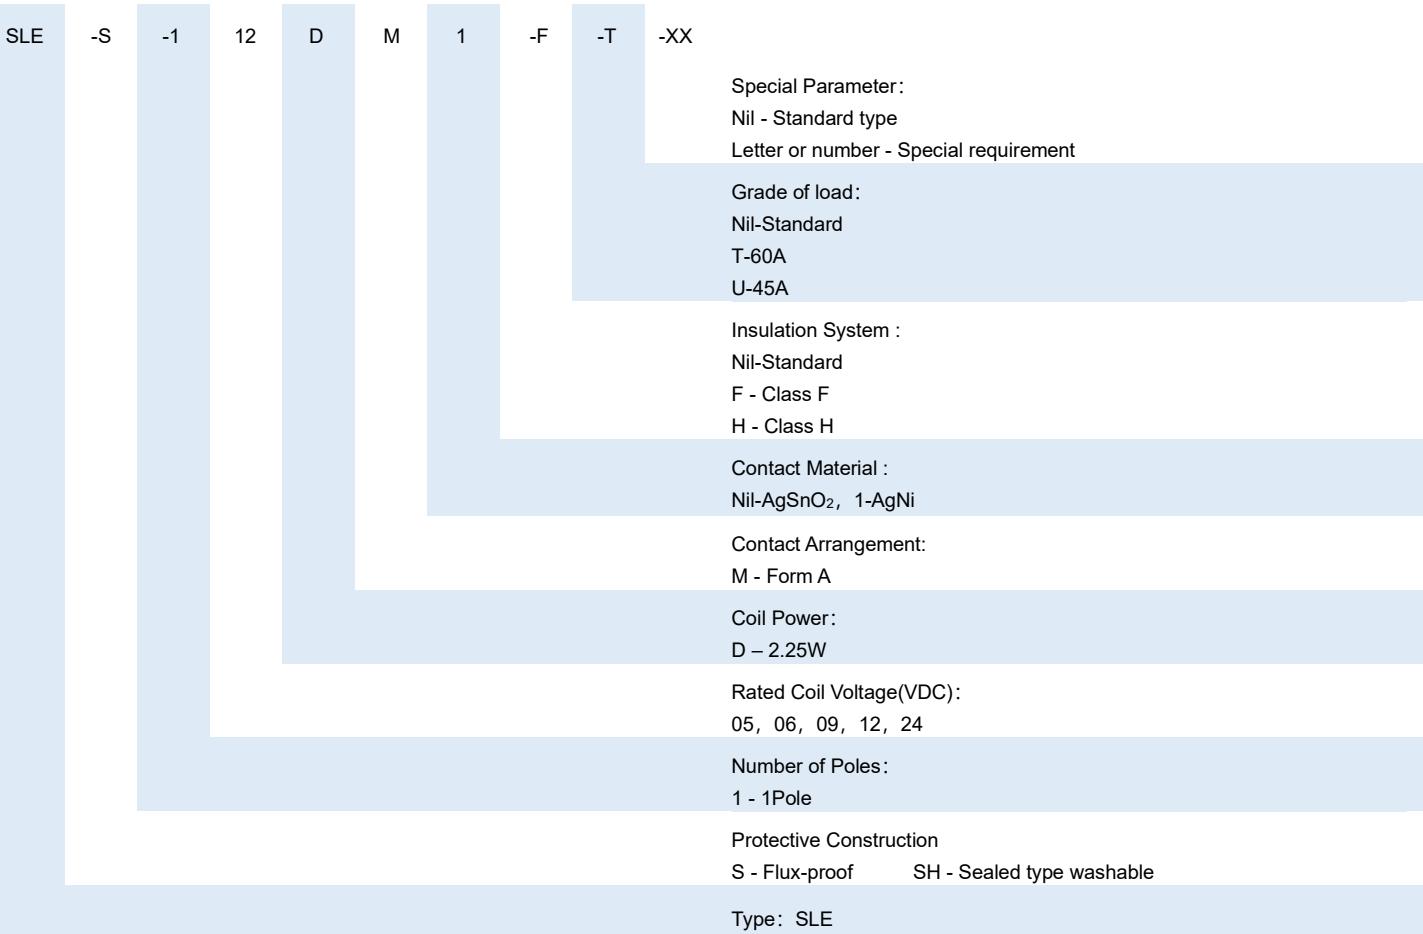
If dimension 1~5mm, tolerance:  $\pm 0.3$ mm

If dimension > 5mm, tolerance:  $\pm 0.4$ mm

**Notes:**

1.The dimension of pin is the size before tinning

2.Tolerance of PCB layout:  $\pm 0.1$  mm.

**Product Code Structure**


- (1) Flux-proof relays can not be used in the environment with pollutants like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.
- (2) Water cleaning or surface process is not suggested after the flux-proof relays are assembled on PCB.
- (3) Customized special suffix is available after being evaluated by Sanyou.

**Examples of Ordering Codes**

SLE-S-112DM-T      relay SLE, Flux-proof, rated DC voltage 12V, coil power 2.25W, 1NO, and contact material AgSnO<sub>2</sub>, 60A

**Disclaimer**

The specification is for reference only. Specifications are subject to change without prior notice.

We could not evaluate all the performance and all the parameters for every possible applications. Thus the users should in a right position to choose suitable product for their own application. For sealed relays, after installation and cleaning, please open the ventilation hole in the case before use. If there is any query, please contact Sanyou for technical services. However it is the user's responsibility to determine which product should be used.