


Features:

- Low coil power consumption .
- Micro-miniature relay, standard PCB terminals.
- Compliance EU RoHS and the requirement of white home appliances.
- Compliant with IEC60335-1(GWT) & CTI250V.
- IEC60079-15 compliant product is available.

Typical applications:

- Home appliances such as air conditioner, heater, etc.
- Vending machine.
- Office equipment such as computer, fax machine, etc.
- Electric controlled window, car antenna, door lock, etc.


Approvals

UL, c-UL (File No.): E190598
 CQC (File No.): CQC02001002126, CQC10002050459, CQC21002306489
 VDE (File No.): 40034479

Contact Data

Contact arrangement	1form C(CO)or 1form A(NO)
Contaft resistance	100m Ω Max.(at 1A 6VDC)
Rated voltage	250VAC
Max.switching voltage	277VAC
Rated current	10A
Min. recommended contact load	1A, 6VDC
Breaking capacity max.	2500VA
Contact material	AgNi, AgSnO ₂
Frequency of operation	360 ops/h
Operate/release time max.	8ms/5ms
Electrical endurance	See electrical endurance graph

Contact ratings

Type	Contact	Load	Cycles
IEC 61810			
SRDI	A/C(NO)	10A,250VAC,cos ϕ =1,85°C	1X10 ⁵
SRDI	A/C(NO)	10A,250VAC,cos ϕ =1,105°C	8X10 ⁴
UL 60947-4-1			
SRDI	A/C(NO)	10A,250VAC,cos ϕ =1,105°C	1X10 ⁵
SRDI	A/C(NO)	1/3 hp, 250 VAC, 40°C	3X10 ⁴
SRDI	A/C(NO)	TV-5, 120 VAC, 40°C	2.5X10 ⁴
GB/T 21711.1-2023			
SRDI	A/C(NO)	10A,250VAC,85°C	2X10 ⁴
SRDI	A/C(NO)	10A,250VAC,105°C	2X10 ⁴
EN 60730-1			
SRDI	A/C(NO)	10A,277VAC,105°C	3X10 ⁴
Mechanical endurance			
			$\geq 1 \times 10^7$

Coil Data

Coil voltage range:	5 to 60VDC
Operative range, IEC 61810	2
Coil insulation system according UL	Class F

Coil Data(continued)

Coil versions, DC coil				
Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω (1±10%)	Rated coil powers mW
5	≤3.75	≥0.5	70	360
6	≤4.5	≥0.6	100	360
9	≤6.75	≥0.9	225	360
12	≤9	≥1.2	400	360
15	≤11.25	≥1.5	625	360
18	≤13.5	≥1.8	900	360
24	≤18	≥2.4	1600	360
48	≤36	≥4.8	6400	360
60	≤45	≥6	10000	360

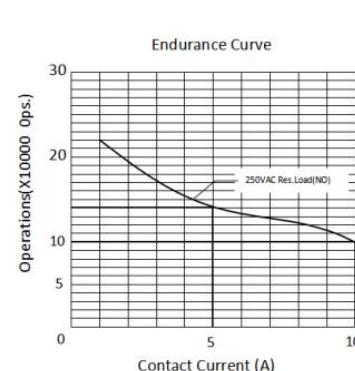
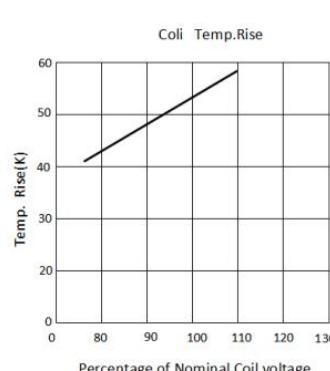
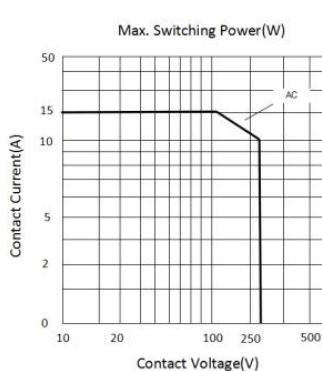
All figures are given for coil without pre-energization, at ambient temperature 20°C

Insulation Data

Initial dielectric strength	
between open contacts	750VAC
between contact and coil	2500VAC
Clearance/Creepage	
between contact and coil (Clearance)	≥1.5mm(actual)
between contact and coil (Creepage)	≥3.0mm(actual)
Material group of insulation parts	IIIa
Tracking index of relay	PTI 175V/PTI 250V

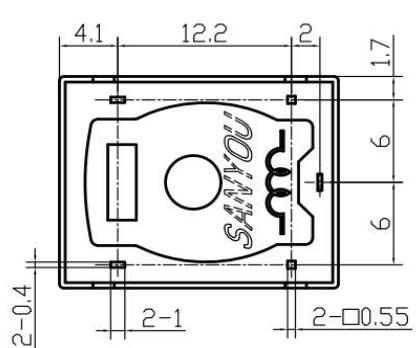
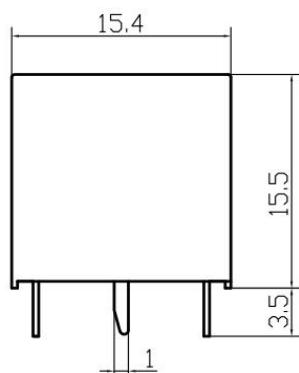
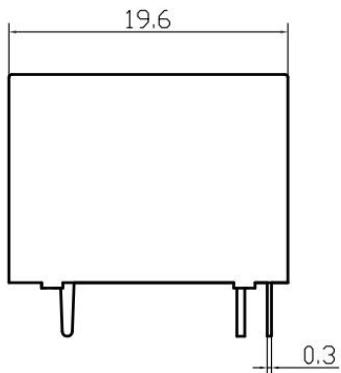
Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH	
Ambient temperature	-40°C to +85°C, -40°C to +105°C
Category of environmental protection	
IEC 61810	RTII - flux proof RTIII - Sealed type washable
Weight	Approx. 8.0g
Resistance to soldering heat THT (IEC 60068-2-20)	260°C/5s
Packaging/unit	tube, tray



Note:

(1)Test conditions: room temperature, flux-proof product, resistive load, 1s on, 9s off.


(2)The above curves are for reference only, and the final result is subject to the experiment.

Dimensions



(bottom view)

Wiring Diagrams (bottom view)


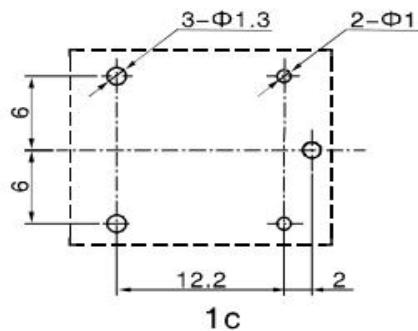
1c



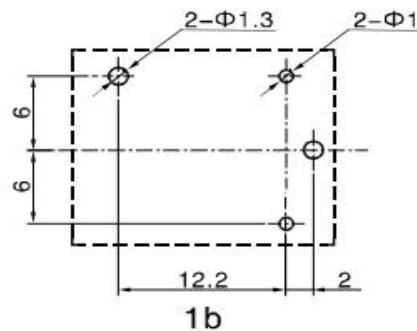
1b



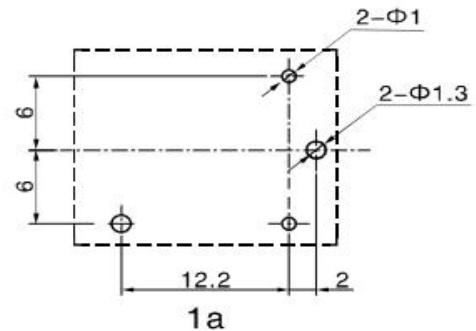
1a

PCB Layouts (bottom view)


1c



1b



1a

In case of no tolerance shown on outline dimension

If dimension < 1 mm, tolerance: ± 0.2 mm

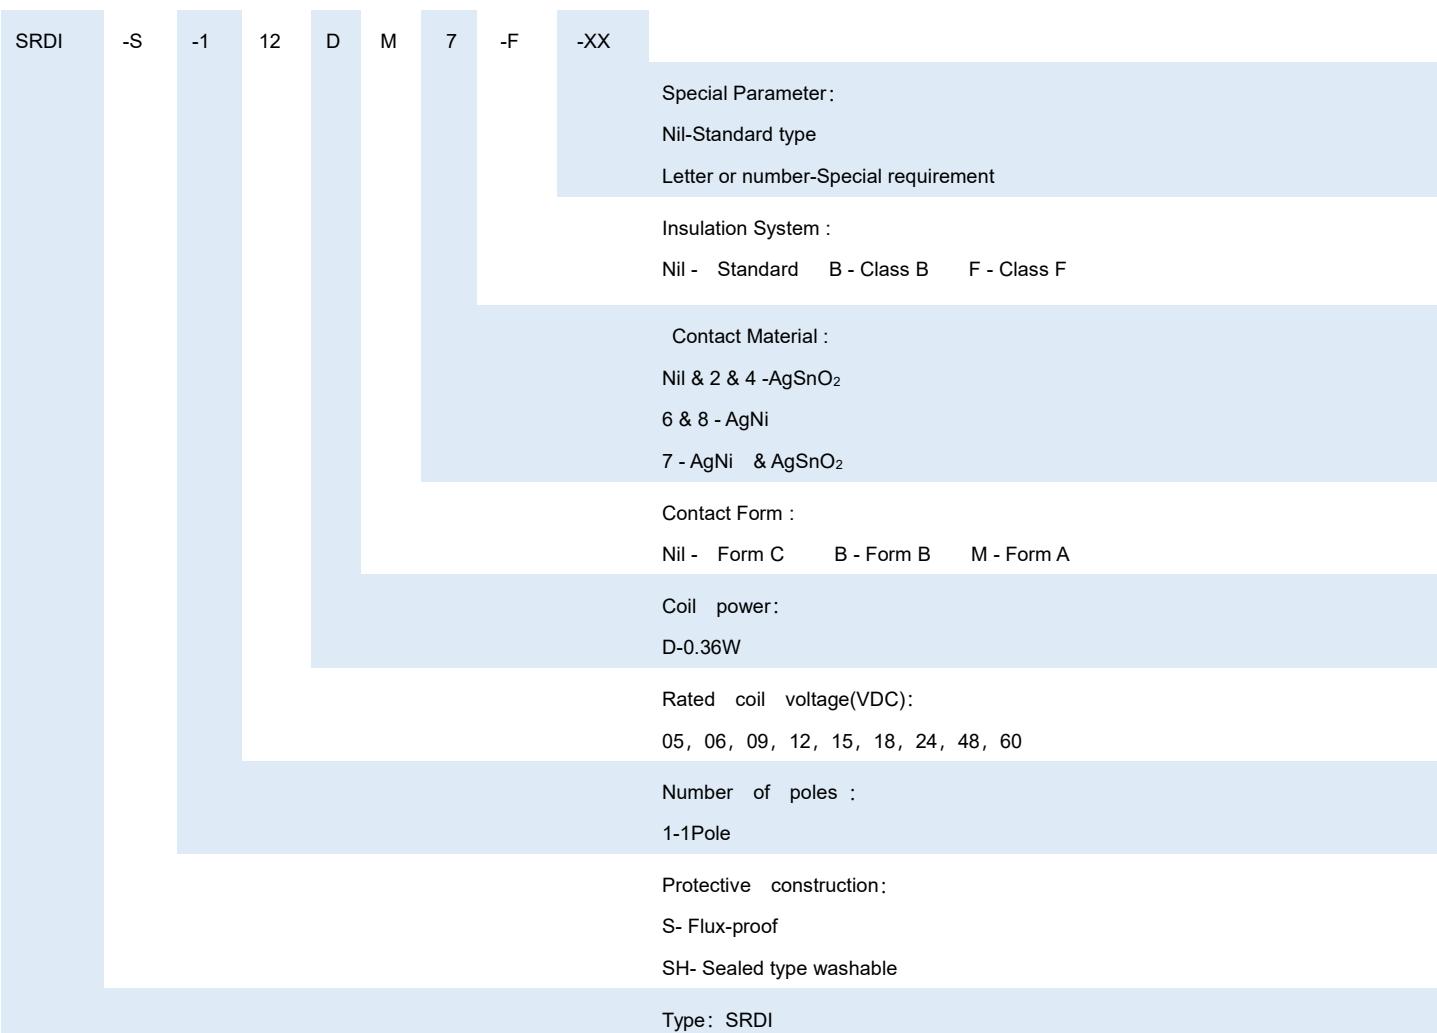
If dimension 1~5mm, tolerance: ± 0.3 mm

If dimension > 5mm, tolerance: ± 0.4 mm

Notes:

1.The dimension of pin is the size before tinning

2.Tolerance of PCB layout: ± 0.1 mm.

Product Code Structure


- (1) Flux-proofed relays can not be used in the environment with pollutants like H₂S, SO₂, NO₂, dust, etc.
- (2) Water cleaning or surface process is not suggested after the flux-proof relays are assembled on PCB.
- (3) The customer special requirement express as special code after evaluating by Sanyou.
- (4) The "VDE" printing on the cover are only available for products with the suffixes of "D" "D2" "D3" "D6" "DM" "DM6".
- (5) Ex suffix stands for products compliant with IEC60079-15.

Examples of Ordering Codes

SRDI-S-112DM relay SRDI , Flux-proof , rated DC voltage 12V ,coil power 0.36W,1NO, and contact material AgSnO₂.
 SRDI-S-112D4 relay SRDI , Flux-proof , rated DC voltage 12V ,coil power 0.36W,1CO, and contact material AgSnO₂

Disclaimer

The specification is for reference only. Specifications are subject to change without prior notice.

We could not evaluate all the performance and all the parameters for every possible applications. Thus the users should in a right position to choose suitable product for their own application. For sealed relays, after installation and cleaning, please open the ventilation hole in the case before use. If there is any query, please contact Sanyou for technical services. However it is the user's responsibility to determine which product should be used.