

Features:

- 22A / 33A Contact Switching Capability.
- It is most suitable for inverters and UPS for solar photovoltaic power generation.
- Contact clearance: 1.5mm (in accordance with IEC 62109-2-2011).

Typical applications:

- It is most suitable for inverters and UPS for solar photovoltaic power generation.
- Suitable for UPS.

Approvals

UL, c-UL (File No.): E190598

TUV (File No.): R50138321

CQC (File No.): CQC02001002131, CQC09002030584

VDE (File No.): 40007481

Contact Data




Contact arrangement	1 form A (NO)
Contact resistance	100mΩ Max.(at 1A 6VDC)
Rated voltage	250VAC
Max. switching voltage	250VAC
Rated current	22A/33A
Min. recommended contact load	1A, 6VDC
Breaking capacity max.	8250VA
Contact material	AgSnO ₂
Frequency of operation	360 ops./h
Operate/release time max.	20ms/10ms
Electrical endurance	See electrical endurance graph

Contact ratings

Type	Contact	Load	Cycles
IEC 61810			
SFK-H	A(NO)	22A, 250VAC, cos φ=1.85°C	3X10 ⁴
SFK-H	A(NO)	33A, 250VAC, cos φ=1.85°C	3X10 ⁴
UL 60947-4-1			
SFK-H	A(NO)	22A, 250VAC, cos φ=1.80°C	3X10 ⁴
SFK-H	A(NO)	33A, 250VAC, cos φ=1.85°C	3X10 ⁴
GB/T 21711.1-2023			
SFK-H	A(NO)	22A, 250VAC, 85°C	3X10 ⁴
SFK-H	A(NO)	33A, 250VAC, 85°C	3X10 ⁴
EN 60730-1			
SFK-H	A(NO)	22A, 250VAC, 85°C	3X10 ⁴
Mechanical endurance			
			≥2X10 ⁶




Coil Data

Coil voltage range:	5 to 24VDC
Operative range, IEC 61810	2
Coil insulation system according UL	Class F

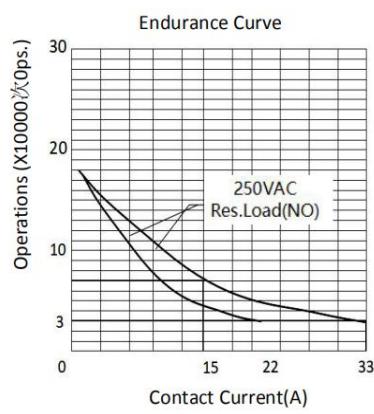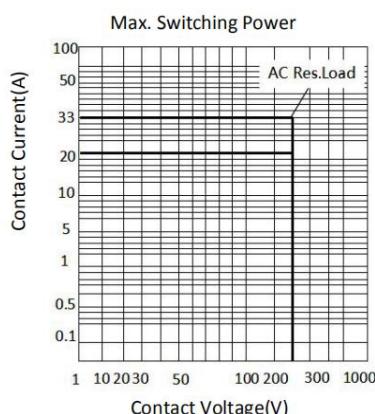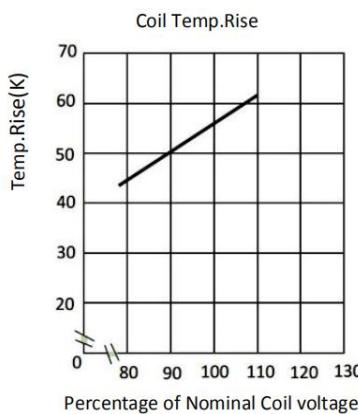

Note:

- (1) Test conditions: room temperature, flux-proof product, resistive load, 1s on, 9s off.
- (2) The above curves are for reference only, and the final result is subject to the experiment.

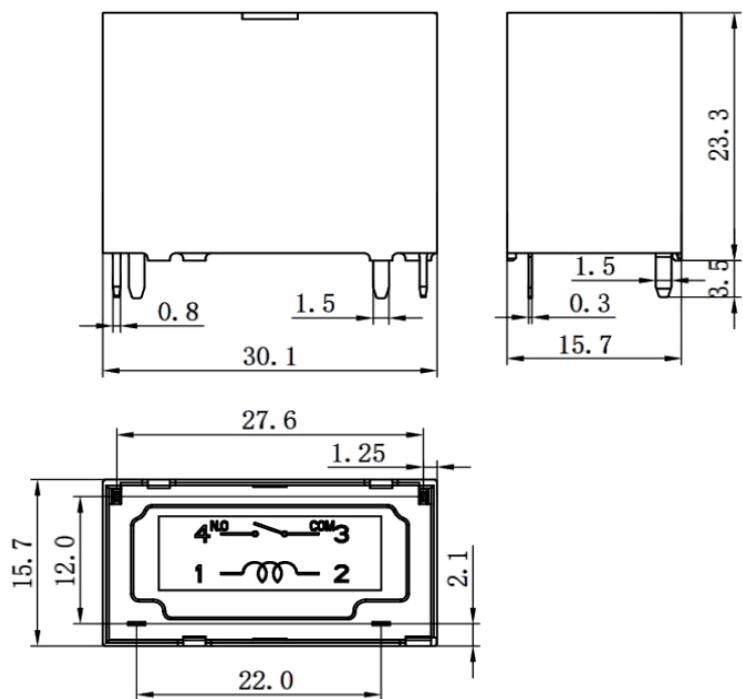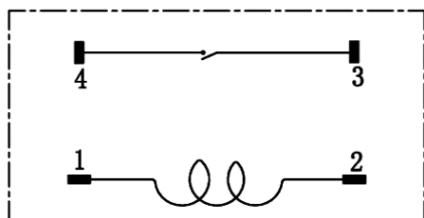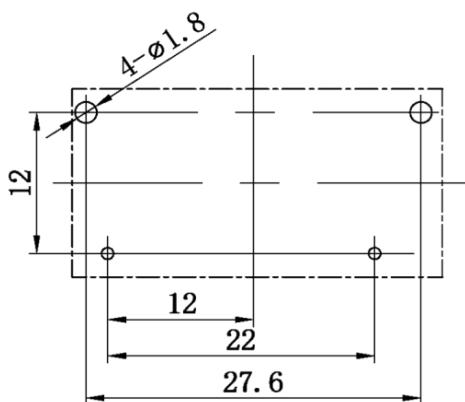Dimensions

Wiring Diagrams (bottom view)

PCB Layouts (bottom view)


In case of no tolerance shown on outline dimension

If dimension < 1 mm, tolerance: ± 0.2 mm

If dimension 1~5mm, tolerance: ± 0.3 mm

If dimension > 5mm, tolerance: ± 0.4 mm

Notes:

1. The dimension of pin is the size before tinning

2. Tolerance of PCB layout: ± 0.1 mm.

Product Code Structure

SFK	-1	12	D	M	P	3	-F	-H	-XX	
										Special Parameter:
										Nil-Standard type
										Letters or Numbers-Special requirements
										H-GAP > 1.5mm, Coil power 1.4W、OP/OP: 2500VAC
										Insulation System:
										Nil-Standard
										B-Class B
										F-Class F
										Contact Material:
										Nil-AgSnO ₂
										Terminal Type:
										P-PCB
										Contact Form:
										M-Form A
										Coil Power:
										D-See coil parameter table
										Coil Voltage (VDC):
										05, 06, 09, 12, 18, 24
										Number of Poles:
										1-1 Pole
										Type: SFK

- (1) Flux-proof relays can not be used in the environment with pollutants like H2S, SO₂, NO₂, dust, etc.
- (2) Water cleaning or surface process is not suggested after the flux-proof relays are assembled on PCB.
- (3) Customized special suffix is available after being evaluated by Sanyou.
- (4) C1 suffix stands for product in accordance to IEC60335-1(GWT) & CTI250V.
- (5) 34 suffix stands for products with contact gap \geq 1.8mm.

Examples of Ordering Codes

SFK-112DMP-F-H relay SFK, rated DC voltage 12V, coil power 1.40W, 1NO, 22A, and contact material AgSnO₂.

SFK-112DMP-F-H-33 relay SFK, rated DC voltage 12V, coil power 1.40W, 1NO, 33A, and contact material AgSnO₂.

Disclaimer

The specification is for reference only. Specifications are subject to change without prior notice.

We could not evaluate all the performance and all the parameters for every possible applications. Thus the users should in a right position to choose suitable product for their own application. For sealed relays, after installation and cleaning, please open the ventilation hole in the case before use. If there is any query, please contact Sanyou for technical services. However it is the user's responsibility to determine which product should be used.