

**Features:**

- 120A switching capacity
- Low power consumption
- Strong anti-shock capability
- Withstand voltage between contacts and coil: 4 KV
- Single/Dual coils available
- Environmentally friendly products(Accord RoHS)
- Compliance with IEC 62052-31 Clause UC 3
- Dimensions: 87.5mm×56.3mm×27.5 mm

**Typical Application:**

- Smart meter
- Remote electrical control
- Power composite switch
- Electrical equipment

**Approvals**

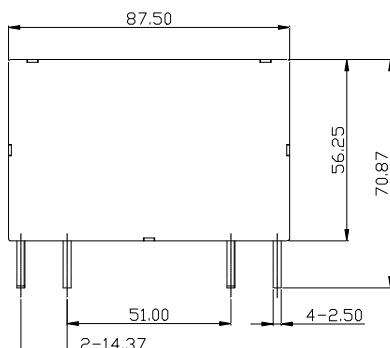
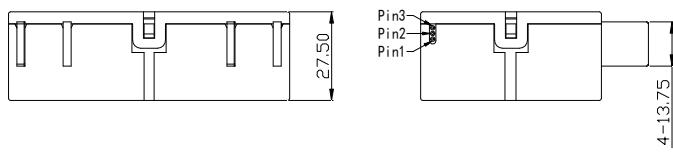
TUV (File No.) : AK 50621321 0001

**Contact Data**

Contact form	2 Form A or 2 Form B
Rated Load	120A 250VAC
Max.switching voltage	277V
Max.switching current	120A
Max.switching power	33,240VA
Contact Material	Silver alloy
Contact resistance	≤1 mΩ
Max.Operate/Release time	20ms/20ms
Electrical Endurance	1x10 <sup>4</sup> cycles (120A 250VAC Resistive electrical 5000 cycles+ Capacitive 5000 cycles PF=0.5 )
Mechanical Endurance	1x10 <sup>5</sup> cycles

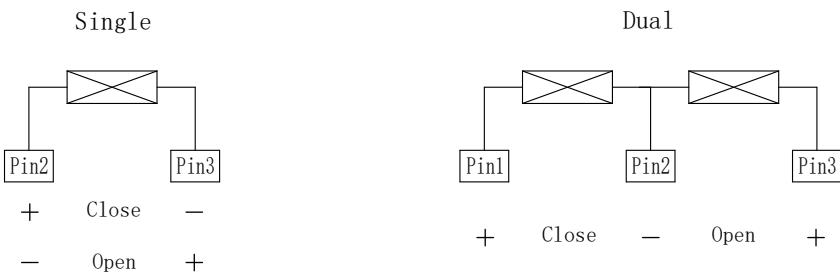
**Insulation Data**

Insulation Resistance	≥1,000MΩ (500VDC)
Dielectric Strength	Contact-Contact AC2,000V; 50/60Hz 1min Contact-Coil AC4,000V; 50/60Hz 1min
Contact-Coil (Creepage distance)	≥8.0mm

**Outline Dimensions (Unit: mm)**

Note: Some product dimensional tolerance is not specified. When <1mm, the tolerance is ±0.2mm; when between 1~5mm, the tolerance is ±0.3mm; when >5mm, the tolerance is ±0.4mm.

### Wiring Diagrams



### Model naming rules

WJ32K -120 -12 D 2 XXX

Customer required type

Coil type: 1- means single coil; 2- means dual coil

Coil Power Consumption: D - Standard Type

Coil Specifications (VDC): 05 , 09 , 12 , 24 , 48

Rated current: 120A

Type: WJ32K

Customized special suffix is available after being evaluated by Sanyou.

### Examples of Ordering Codes

WJ32K-120-12D2

Relay WJ32K, Rated current 120 A, Coil Specifications 12 VDC, Standard type, Dual coil

### Cautions

1. The original position of latching relay is "closed" when shipping. It is possible that during transit or installation, the relay may change its state to be "open" position, it is recommended to set the relay in to state needed via apply voltage to the coil.
2. In order to let relay operate normally, the voltage which apply to the coil should reach to the rated voltage, the pulse width should be 50ms to 100ms. Do not energize both coil at the same time on Dual coil or energize the coil for longer than minute.
3. Relay without copper wire, the terminal can not be soldered, bend, and rigid fasten both two terminals.
4. Keep away from corrosive gas and other condition which may damage the relay.

### Disclaimer

This product specification is for reference only and may change without prior notice. Customers should select the appropriate product model according to the performance parameter requirements of their specific application areas. The customer will bear the responsibility and loss caused by improper selection. For more technical support, please contact Sanyou Corporation Limited.